

Inria

RESEARCH CENTER
Grenoble - Rhône-Alpes

FIELD

Activity Report 2019

Section Application Domains

Edition: 2020-03-21

ALGORITHMICS, PROGRAMMING, SOFTWARE AND ARCHITECTURE

1. ARIC Project-Team 5
2. CASH Project-Team (section vide) 6
3. CONVECS Project-Team 7
4. CORSE Project-Team 8
5. DATASPHERE Team 9
6. PRIVATICS Project-Team 10
7. SPADES Project-Team 12

APPLIED MATHEMATICS, COMPUTATION AND SIMULATION

8. ELAN Project-Team 13
9. MISTIS Project-Team 15
10. NANO-D Team (section vide) 16
11. NECS Team 17
12. TRIPOP Project-Team 19

DIGITAL HEALTH, BIOLOGY AND EARTH

13. AIRSEA Project-Team 23
14. BEAGLE Project-Team 24
15. DRACULA Project-Team (section vide) 25
16. ERABLE Project-Team 26
17. IBIS Project-Team (section vide) 27
18. MOSAIC Project-Team (section vide) 28
19. NUMED Project-Team (section vide) 29
20. STEEP Project-Team 30

NETWORKS, SYSTEMS AND SERVICES, DISTRIBUTED COMPUTING

21. AGORA Project-Team 34
22. AVALON Project-Team 35
23. CTRL-A Project-Team 37
24. DANTE Project-Team 38
25. DATAMOVE Project-Team 40
26. MARACAS Team 48
27. POLARIS Project-Team 50
28. ROMA Project-Team 52
29. SOCRATE Project-Team (section vide) 53

PERCEPTION, COGNITION AND INTERACTION

30. CHROMA Project-Team 54
31. IMAGINE Project-Team 56
32. MAVERICK Project-Team 57
33. MOEX Project-Team (section vide) 58
34. MORPHEO Project-Team 59
35. PERCEPTION Project-Team (section vide) 60
36. PERVASIVE Project-Team 61

| | |
|------------------------------|----|
| 37. THOTH Project-Team | 64 |
| 38. TYREX Project-Team | 65 |

ARIC Project-Team

4. Application Domains

4.1. Floating-point and Validated Numerics

Our expertise on validated numerics is useful to analyze and improve, and guarantee the quality of numerical results in a wide range of applications including:

- scientific simulation;
- global optimization;
- control theory.

Much of our work, in particular the development of correctly rounded elementary functions, is critical to the

- reproducibility of floating-point computations.

4.2. Cryptography, Cryptology, Communication Theory

Lattice reduction algorithms have direct applications in

- public-key cryptography;
- diophantine equations;
- communications theory.

CASH Project-Team (section vide)

CONVECS Project-Team

4. Application Domains

4.1. Application Domains

The theoretical framework we use (automata, process algebras, bisimulations, temporal logics, etc.) and the software tools we develop are general enough to fit the needs of many application domains. They are applicable to virtually any system or protocol that consists of distributed agents communicating by asynchronous messages. The list of recent case studies performed with the CADP toolbox (see in particular § 7.5) illustrates the diversity of applications:

- *Bioinformatics*: genetic regulatory networks, nutritional stress response, metabolic pathways,
- *Component-based systems*: Web services, peer-to-peer networks,
- *Cloud computing*: self-deployment protocols, dynamic reconfiguration protocols,
- *Fog and IoT*: stateful IoT applications in the fog,
- *Databases*: transaction protocols, distributed knowledge bases, stock management,
- *Distributed systems*: virtual shared memory, dynamic reconfiguration algorithms, fault tolerance algorithms, cloud computing,
- *Embedded systems*: air traffic control, avionic systems, train supervision systems, medical devices,
- *Hardware architectures*: multiprocessor architectures, systems on chip, cache coherency protocols, hardware/software codesign,
- *Human-machine interaction*: graphical interfaces, biomedical data visualization, plasticity,
- *Security protocols*: authentication, electronic transactions, cryptographic key distribution,
- *Telecommunications*: high-speed networks, network management, mobile telephony, feature interaction detection.

CORSE Project-Team

4. Application Domains

4.1. Transfer

The main industrial sector related to the research activities of CORSE is the one of semi-conductor (programmable architectures spanning from embedded systems to servers). Obviously any computing application which has the objective of exploiting as much as possible the resources (in terms of high-performance but also low energy consumption) of the host architecture is intended to take advantage of advances in compiler and run-time technology. These applications are based over numerical kernels (linear algebra, FFT, convolution...) that can be adapted on a large spectrum of architectures. More specifically, an important activity concerns the optimization of machine learning applications for some high-performance accelerators. Members of CORSE already maintain fruitful and strong collaborations with several companies such as STMICROELECTRONICS, Atos/Bull, Kalray.

DATASPHERE Team

4. Application Domains

4.1. Governance

- City governance, local democracy and interaction with citizens.
- Local governance versus global norms and control.
- Strategy beyond public open data.
- Smart city governance.

4.2. CyberSecurity

- Cyber-strategy, defense and security in an evolving world shaped by the digital in particular China/Russia/US cyber-strategy.
- Data strategy for the digital economy, cross border intermediation, platform strategie.
- Strategy of Artificial Intelligence, transparency/acceptability/explainability of AI.
- Cartography of the cyberspace.
- Network, BGP security.

4.3. Anthropocene

- Adaptation to the conditions of the anthropocene, digital control of resources and homeostasis.
- Geopolitics of the environmental challenges, adaptation and mitigation.
- Contemporaneity of the digital revolution and global warming.

PRIVATICS Project-Team

3. Application Domains

3.1. Domain 1: Privacy in smart environments

Privacy in smart environments. One illustrative example is our latest work on privacy-preserving smart-metering [2]. Several countries throughout the world are planning to deploy smart meters in house-holds in the very near future. Traditional electrical meters only measure total consumption on a given period of time (i.e., one month or one year). As such, they do not provide accurate information of when the energy was consumed. Smart meters, instead, monitor and report consumption in intervals of few minutes. They allow the utility provider to monitor, almost in real-time, consumption and possibly adjust generation and prices according to the demand. Billing customers by how much is consumed and at what time of day will probably change consumption habits to help matching energy consumption with production. In the longer term, with the advent of smart appliances, it is expected that the smart grid will remotely control selected appliances to reduce demand. Although smart metering might help improving energy management, it creates many new privacy problems. Smart-meters provide very accurate consumption data to electricity providers. As the interval of data collected by smart meters decreases, the ability to disaggregate low-resolution data increases. Analysing high-resolution consumption data, Non-intrusive Appliance Load Monitoring (NALM) can be used to identify a remarkable number of electric appliances (e.g., water heaters, well pumps, furnace blowers, refrigerators, and air conditioners) employing exhaustive appliance signature libraries. We developed DREAM, Differentially privatE smArt Metering, a scheme that is private under the differential privacy model and therefore provides strong and provable guarantees. With our scheme, an (electricity) supplier can periodically collect data from smart-meters and derive aggregated statistics while learning only limited information about the activities of individual households. For example, a supplier cannot tell from a user's trace when he watched TV or turned on heating.

3.2. Domain 2: Big Data and Privacy

We believe that another important problem will be related to privacy issues in big data. Public datasets are used in a variety of applications spanning from genome and web usage analysis to location-based and recommendation systems. Publishing such datasets is important since they can help us analyzing and understanding interesting patterns. For example, mobility trajectories have become widely collected in recent years and have opened the possibility to improve our understanding of large-scale social networks by investigating how people exchange information, interact, and develop social interactions. With billion of handsets in use worldwide, the quantity of mobility data is gigantic. When aggregated, they can help understand complex processes, such as the spread of viruses, and build better transportation systems. While the benefits provided by these datasets are indisputable, they unfortunately pose a considerable threat to individual privacy. In fact, mobility trajectories might be used by a malicious attacker to discover potential sensitive information about a user, such as his habits, religion or relationships. Because privacy is so important to people, companies and researchers are reluctant to publish datasets by fear of being held responsible for potential privacy breaches. As a result, only very few of them are actually released and available. This limits our ability to analyze such data to derive information that could benefit the general public. It is now an urgent need to develop Privacy-Preserving Data Analytics (PPDA) systems that collect and transform raw data into a version that is immunized against privacy attacks but that still preserves useful information for data analysis. This is one of the objectives of Privatics. There exists two classes of PPDA according to whether the entity that is collecting and anonymizing the data is trusted or not. In the trusted model, that we refer to as Privacy-Preserving Data Publishing (PPDP), individuals trust the publisher to which they disclose their data. In the untrusted model, that we refer to as Privacy-Preserving Data Collection (PPDC), individuals do not trust the data publisher. They may add some noise to their data to protect sensitive information from the data publisher.

Privacy-Preserving Data Publishing: In the trusted model, individuals trust the data publisher and disclose all their data to it. For example, in a medical scenario, patients give their true information to hospitals to receive proper treatment. It is then the responsibility of the data publisher to protect privacy of the individuals' personal data. To prevent potential data leakage, datasets must be sanitized before possible release. Several proposals have been recently proposed to release private data under the Differential Privacy model [25, 56, 26, 57, 50]. However most of these schemes release a "snapshot" of the datasets at a given period of time. This release often consists of histograms. They can, for example, show the distributions of some pathologies (such as cancer, flu, HIV, hepatitis, etc.) in a given population. For many analytics applications, "snapshots" of data are not enough, and sequential data are required. Furthermore, current work focusses on rather simple data structures, such as numerical data. Release of more complex data, such as graphs, are often also very useful. For example, recommendation systems need the sequences of visited websites or bought items. They also need to analyse people connection graphs to identify the best products to recommend. Network trace analytics also rely on sequences of events to detect anomalies or intrusions. Similarly, traffic analytics applications typically need sequences of visited places of each user. In fact, it is often essential for these applications to know that user A moved from position 1 to position 2, or at least to learn the probability of a move from position 1 to position 2. Histograms would typically represent the number of users in position 1 and position 2, but would not provide the number of users that moved from position 1 to position 2. Due to the inherent sequentiality and high-dimensionality of sequential data, one major challenge of applying current data sanitization solutions on sequential data comes from the uniqueness of sequences (e.g., very few sequences are identical). This fact makes existing techniques result in poor utility. Schemes to privately release data with complex data structures, such as sequential, relational and graph data, are required. This is one the goals of Privatics. In our current work, we address this challenge by employing a variable-length n-gram model, which extracts the essential information of a sequential database in terms of a set of variable-length n - grams [15]. We then intend to extend this approach to more complex data structures.

Privacy-Preserving Data Collection: In the untrusted model, individuals do not trust their data publisher. For example, websites commonly use third party web analytics services, such as Google Analytics to obtain aggregate traffic statistics such as most visited pages, visitors' countries, etc. Similarly, other applications, such as smart metering or targeted advertising applications, are also tracking users in order to derive aggregated information about a particular class of users. Unfortunately, to obtain this aggregate information, services need to track users, resulting in a violation of user privacy. One of our goals is to develop Privacy-Preserving Data Collection solutions. We propose to study whether it is possible to provide efficient collection/aggregation solutions without tracking users, i.e. without getting or learning individual contributions.

SPADES Project-Team

4. Application Domains

4.1. Industrial Applications

Our applications are in the embedded system area, typically: transportation, energy production, robotics, telecommunications, the Internet of things (IoT), systems on chip (SoC). In some areas, safety is critical, and motivates the investment in formal methods and techniques for design. But even in less critical contexts, like telecommunications and multimedia, these techniques can be beneficial in improving the efficiency and the quality of designs, as well as the cost of the programming and the validation processes.

Industrial acceptance of formal techniques, as well as their deployment, goes necessarily through their usability by specialists of the application domain, rather than of the formal techniques themselves. Hence, we are looking to propose domain-specific (but generic) realistic models, validated through experience (*e.g.*, control tasks systems), based on formal techniques with a high degree of automation (*e.g.*, synchronous models), and tailored for concrete functionalities (*e.g.*, code generation).

4.2. Current Industrial Cooperations

Regarding applications and case studies with industrial end-users of our techniques, we cooperate with Orange Labs on software architecture for cloud services.

ELAN Project-Team

4. Application Domains

4.1. Mechanical Engineering

Many physicists and mathematicians have strived for centuries to understand the principles governing those complex mechanical phenomena, providing a number of continuous models for slender structures, granular matter, and frictional contact. In the XXth century, industrial applications such as process automatization and new ways of transportation have boosted the fields of Mechanical Engineering and Computer-Aided Design, where material strength, reliability of mechanisms, and safety, stood for the main priorities. Instead, large displacements of structures, buckling, tearing, or entanglement, and even dynamics, were long considered as undesirable behaviors, thus restraining the search for corresponding numerical models.

Only recently, the engineering industry has shown some new and growing interest into the modeling of dynamic phenomena prone to large displacements, contact and friction. For instance, the cosmetology industry is more and more interested in understanding the nonlinear deformation of hair and skin, with the help of simulation. Likewise, auto and aircraft manufacturers are facing new challenges involving buckling or entanglement of thin structures such as carbon or optical fibers; they clearly lack predictive, robust and efficient numerical tools for simulating and optimizing their new manufacturing process, which share many common features with the large-scale simulation scenarii traditionally studied in Computer Graphics applications.

4.2. Computer Graphics

In contrast, Computer Graphics, which has emerged in the 60's with the advent of modern computers, was from the very beginning eager to capture such peculiar phenomena, with the sole aim to produce spectacular images and create astonishing stories. At the origin, Computer Graphics thus drastically departed from other scientific fields. Everyday-life phenomena such as cloth buckling, paper tearing, or hair fluttering in the wind, mostly ignored by other scientists at that time, became actual topics of interest, involving a large set of new research directions to be explored, both in terms of modelling and simulation. Nowadays, although the image production still remains the core activity of the Computer Graphics community, more and more research studies are directed through the virtual and real prototyping of mechanical systems, notably driven by a myriad of new applications in the virtual try on industry (e.g., hairstyling and garment fitting). Furthermore, the advent of additive fabrication is currently boosting research in the free design of new mechanisms or systems for various applications, from architecture design and fabrication of metamaterials to the creation of new locomotion modes in robotics. Some obvious common interests and approaches are thus emerging between Computer Graphics and Mechanical Engineering, yet the two communities remain desperately compartmentalized.

4.3. Soft Matter Physics

From the physics-based viewpoint, since a few decades a new generation of physicists became interested again in the understanding of such visually fascinating phenomena, and started investigating the tight links between geometry and elasticity⁰. Common objects such as folded or torn paper, twined plants, coiled honey threads, or human hair have thus regained some popularity among the community in Nonlinear Physics⁰. In consequence, phenomena of interest have become remarkably close to those of Computer Graphics, since scientists in both places share the common goal to model complex and integrated mechanical phenomena at the macroscopic

⁰In France this new trend was particularly stimulated by the work of Yves Pomeau, who convinced many young scientists to study the nonlinear physics of common objects such as paper, plants, or hair [27].

⁰It is however amusing to observe that research in these areas is quite successful in obtaining the IG Nobel prize [8], [30], thus still being considered as an exotic research topic by physicists.

scale. Of course, the goals and employed methodologies differ substantially from one community to the other, but showcase some evident complementarity: while computer scientists are eager to learn and understand new physical models, physicists get more and more interested in the numerical tools, in which they perceive not only a means to confirm predictions afterwards, but also a support for testing new hypothesis and exploring scenarios that would be too cumbersome or even impossible to investigate experimentally. Besides, numerical exploration starts becoming a valuable tool for getting insights into the search for analytic solutions, thus fully participating to the modeling stage and physical understanding. However, physicists may be limited to a blind usage of numerical black boxes, which may furthermore not be dedicated to their specific needs. According to us, promoting a science of modeling in numerical physics would thus be a promising and rich avenue for the two research fields. Unfortunately, very scarce cooperation currently exists between the two communities, and large networks of collaboration still need to be set up.

MISTIS Project-Team

4. Application Domains

4.1. Image Analysis

Participants: Alexis Arnaud, Veronica Munoz Ramirez, Florence Forbes, Stephane Girard, Hongliang Lu, Fabien Boux, Benoit Kugler, Alexandre Constantin.

As regards applications, several areas of image analysis can be covered using the tools developed in the team. More specifically, in collaboration with team PERCEPTION, we address various issues in computer vision involving Bayesian modelling and probabilistic clustering techniques. Other applications in medical imaging are natural. We work more specifically on MRI and functional MRI data, in collaboration with the Grenoble Institute of Neuroscience (GIN). We also consider other statistical 2D fields coming from other domains such as remote sensing, in collaboration with the Institut de Planétologie et d'Astrophysique de Grenoble (IPAG) and the Centre National d'Etudes Spatiales (CNES). In this context, we worked on hyperspectral and/or multitemporal images. In the context of the "pole de compétitivité" project I-VP, we worked on images of PC Boards.

4.2. Biology, Environment and Medicine

Participants: Alexis Arnaud, Florence Forbes, Stephane Girard, Jean-Baptiste Durand, Julyan Arbel, Brice Olivier, Karina Ashurbekova, Fabien Boux, Veronica Munoz Ramirez, Fei Zheng.

A third domain of applications concerns biology and medicine. We considered the use of mixture models to identify biomarkers. We also investigated statistical tools for the analysis of fluorescence signals in molecular biology. Applications in neurosciences are also considered. In the environmental domain, we considered the modelling of high-impact weather events and the use of hyperspectral data as a new tool for quantitative ecology.

NANO-D Team (section vide)

NECS Team

4. Application Domains

4.1. A large variety of application domains

Sensor and actuator networks are ubiquitous in modern world, thanks to the advent of cheap small devices endowed with communication and computation capabilities. Potential application domains for research in networked control and in distributed estimation are extremely various, and include the following examples.

- Intelligent buildings, where sensor information on CO_2 concentration, temperature, room occupancy, etc. can be used to control the heating, ventilation and air conditioning (HVAC) system under multi-objective considerations of comfort, air quality, and energy consumption.
- Smart grids: the operation of electrical networks is changing from a centralized optimization framework towards more distributed and adaptive protocols, due to the high number of small local energy producers (e.g., solar panels on house roofs) that now interact with the classic large power-plants.
- Disaster relief operations, where data collected by sensor networks can be used to guide the actions of human operators and/or to operate automated rescue equipment.
- Inertial navigation and surveillance using swarms of Unmanned Aerial Vehicles (UAVs), where sensor information (from sensors on the ground and/or on-board) can be used to guide the UAVs to accomplish their mission.
- Environmental monitoring and exploration using self-organized fleets of Autonomous Underwater Vehicles (AUVs), collaborating in order to reach a goal such as finding a pollutant source or tracing a seabed map.
- Infrastructure security and protection using smart camera networks, where the images collected are shared among the cameras and used to control the cameras themselves (pan-tilt-zoom) and ensure tracking of potential threats.
- Collaborative indoor and outdoor navigation of pedestrians.

In particular, NECS team is currently focusing in the areas described in detail below.

4.2. Intelligent transportation systems

Throughout the world, roadways are notorious for their congestion, from dense urban network to large freeway systems. This situation tends to get worse over time due to the continuous increase of transportation demand whereas public investments are decreasing and space is lacking to build new infrastructures. The most obvious impact of traffic congestion for citizens is the increase of travel times and fuel consumption. Another critical effect is that infrastructures are not operated at their capacity during congestion, implying that fewer vehicles are served than the amount they were designed for. Using macroscopic fluid-like models, the NECS team has initiated new researches to develop innovative traffic management policies able to improve the infrastructure operations. The research activity is on two main challenges: (1) modeling and forecasting, so as to provide accurate information to users, e.g., travel times; and (2) control, via ramp-metering and/or variable speed limits. The Grenoble Traffic Lab (see <http://necs.inrialpes.fr/pages/grenoble-traffic-lab.php>) is an experimental platform, collecting traffic infrastructure information in real time from Grenoble South Ring, together with innovative software e.g. for travel-time prediction, and a show-case where to graphically illustrate results to the end-user. This activity is done in close collaboration with local traffic authorities (DIR-CE, CG38, La Metro), and with the start-up company Karrus (<http://www.karrus-its.com/>)

4.3. Inertial navigation


The team is exploring techniques and approaches from estimation, filtering and machine learning, in order to use inertial sensor units in pedestrian navigation, attitude estimation, transportation modes and human activities recognition. These units are composed of accelerometers, magnetometers and gyroscopes, sensors that we find usually in smartphones, tablets and smartwatches. This area of research in the team will evolve towards multimodal navigation, cooperative and collaborative navigation in indoor and outdoor environments.

TRIPPOP Project-Team

4. Application Domains

4.1. Domain 1


Nonsmooth dynamical systems arise in a lot of application fields. *We briefly expose here some applications that have been treated in the BIPOP team and that we will continue in the TRIPOP team, as a validation for the research axes and also in terms of transfer.* In mechanics, the main instances of nonsmooth dynamical systems are multibody systems with Signorini's unilateral contact, set-valued (Coulomb-like) friction and impacts, or in continuum mechanics, ideal plasticity, fracture or damage. Some illustrations are given in Figure 5 (a-f). Other instances of nonsmooth dynamical systems can also be found in electrical circuits with ideal components (see Figure 5 (g)) and in control theory, mainly with sliding mode control and variable structure systems (see Figure 5 (h)). More generally, every time a piecewise, possibly set-valued, model of systems is invoked, we end up with a nonsmooth system. This is the case, for instance, for hybrid systems in nonlinear control or for piecewise linear modeling of gene regulatory networks in mathematical biology (see Figure 5 (i)). Another common example of nonsmooth dynamics is also found when the vector field of a dynamical system is defined as a solution of an optimization problem under constraints, or a variational inequality. Examples of this kind are found in the optimal control theory, in dynamic Nash equilibrium or in the theory of dynamic flows over networks.




Circuit breakers mechanisms [38]



Granular flows





Robots (ESA ExoMars Rover [32])




Rockfall [44], [43], [58]

Figure 3. Application fields of nonsmooth dynamics (mechanics)

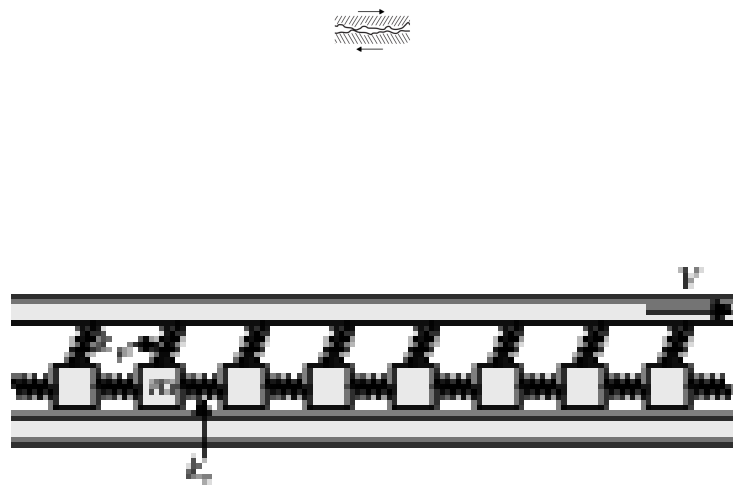


Frictional interface and solitary waves in the Burridge-Knopoff model [80]






Sliding blocks




Figure 4. Application fields of nonsmooth dynamics (waves)

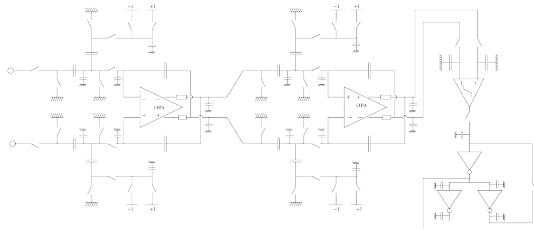

Switched electrical circuits (delta-sigma converter) [26]



Sliding mode control [29], [31], [69], [70], [79]



Gene regulatory networks [35]

Figure 5. Application fields of nonsmooth dynamics

AIRSEA Project-Team

4. Application Domains

4.1. The Ocean-Atmosphere System

The evolution of natural systems, in the short, mid, or long term, has extremely important consequences for both the global Earth system and humanity. Forecasting this evolution is thus a major challenge from the scientific, economic, and human viewpoints.

Humanity has to face the problem of **global warming**, brought on by the emission of greenhouse gases from human activities. This warming will probably cause huge changes at global and regional scales, in terms of climate, vegetation and biodiversity, with major consequences for local populations. Research has therefore been conducted over the past 15 to 20 years in an effort to model the Earth's climate and forecast its evolution in the 21st century in response to anthropic action.

With regard to short-term forecasts, the best and oldest example is of course **weather forecasting**. Meteorological services have been providing daily short-term forecasts for several decades which are of crucial importance for numerous human activities.

Numerous other problems can also be mentioned, like **seasonal weather forecasting** (to enable powerful phenomena like an El Niño event or a drought period to be anticipated a few months in advance), **operational oceanography** (short-term forecasts of the evolution of the ocean system to provide services for the fishing industry, ship routing, defense, or the fight against marine pollution) or the prediction of **floods**.

As mentioned previously, mathematical and numerical tools are omnipresent and play a fundamental role in these areas of research. In this context, the vocation of AIRSEA is not to carry out numerical prediction, but to address mathematical issues raised by the development of prediction systems for these application fields, in close collaboration with geophysicists.

BEAGLE Project-Team

4. Application Domains

4.1. Functional and Evolutionary Biology

We do not distinguish our research and its application domains. Our shared idea is that the research is oriented by a scientific question, which is a multidisciplinary one, most often of biological nature. We do not develop methodologies independently from this question and then look for applications. Instead we collectively work with other disciplines to solve a question, with our competencies.

In consequence the application domains are already listed in the description of our projects and goals. They concern functional and evolutionary biology, related to critical social questions as human and plant health.

4.2. Social and Environmental Responsibility (Implication domains)

These last years we have maintained a frequent team discussion on the social and environmental responsibility of researchers. It has become more frequent this year, with the announcements of serious environmental issues by many governmental or non governmental organizations.

We are engaged in many actions regarding this responsibility. A constant ethics questioning, directing our research projects according to our values, teaching and popularization of ethical values. In particular we are engaged in several research projects on health and environment, and one of us has been a member of the institutional workgroup on environmental issues at Inria.

Regarding the functioning of research activities, we attempted a measure of the environmental footprint of our activities, regardless of their aims. It has the shape of a carbon footprint analysis, gathering the carbon footprint of travels, computer usage, computer equipment. We are aware of the incompleteness of this analysis, as well by not including many activities (nutrition, homeplace-workplace trips), and not taking other environmental issues than carbon emissions.

However it is a starting point, that we presented to many colleagues who were interested in reproducing the computation, so we give the headlines here. We used the unitary costs given by a website we constructed: <https://ferme.yeswiki.net/Empreinte>. The data was collected on an average taken over 3 years, 2016-2018 (we cannot yet at this stage make the analysis for 2019). Travels by members of the team or invited researchers emitted 39.86tCO₂. Computing hours on local clusters emitted 17.46tCO₂. The acquisition of computers accounts for the emission of 4.53tCO₂. The total is 61.85tCO₂.

Based on this lower bound of our CO₂ emissions, the total per person is around 3 tons per person. Probably this number is highly underevaluated since it accounts for only part of our professional activities.

Whether it is too high or acceptable, and the establishment of a carbon budget is a difficult question. If we refer to the goals of the COP21 conclusions, we should emit less than 2 tons of CO₂ per person in 2050 to reach carbon neutrality. This includes professional and personal life, and all the services we benefit from. We did not arrive yet at a consensus on the objective we should reach to consider we have a sustainable activity, but we in majority recognize that we are anyway far above what would be a consensus objective. We are still in a discussion to engage in a reduction.

DRACULA Project-Team (section vide)

ERABLE Project-Team

4. Application Domains

4.1. Biology and Health

The main areas of application of ERABLE are: (1) biology understood in its more general sense, with a special focus on symbiosis and on intracellular interactions, and (2) health with a special emphasis for now on infectious diseases, rare diseases, and cancer.

IBIS Project-Team (section vide)

MOSAIC Project-Team (section vide)

NUMED Project-Team (section vide)

STEPP Project-Team

4. Application Domains

4.1. Introduction

In the context described in the previous sections, we can distinguish two connected and complementary strategies for analyzing environmental pressures: a sectorial approach and a spatial one. The first one is more directly connected to ecological accounting, the second one has more direct relations to urban economy and land cover modelling. We start by describing the former.

4.2. Ecological accounting for sectorial pressure assessment

One of the major issues in the assessment of the long-term sustainability of urban areas is related to the concept of “imported sustainability”. Cities bring in from the outside most of their material and energy resources, and reject to the outside the waste produced by their activity. The modern era has seen a dramatic increase in both volume and variety of these material flows and consumption as well as in distance of origin and destination of these flows, usually accompanied by a spectacular increase in the associated environmental impacts. A realistic assessment of the sustainability of urban areas requires to quantify both local and distant environmental impacts; greenhouse gas emissions are only one aspect of this question. Such an assessment brings to light the most relevant direct and indirect lines of action on these issues. In this respect, it is useful to introduce the alternative concepts of consumer versus producer responsibility (or point of view).

The producer point of view is the most useful to pinpoint relevant direct lines of actions on environmental pressures due to production. In other respects, any territory imports and exports goods and services from and to the rest of the world. The consumer point of view provides information on the indirect pressures associated with these exchanges, as production responds to a final demand. Tracking the various supply chains through the analysis of the structure of the local economy and its relations and dependencies to the external world allows us to identify critically important contributions to environmental pressures; this also enables us to define fair environmental indicators in order not to attribute environmental pressures to producers only (whose responsibility is the easier to quantify of the two). In this approach, the producer responsibility follows directly from the measurement of its energy and material uses, while the consumer responsibility is established indirectly through an allocation of the impacts of production to the final consumers, but this second mode of allocation is to some extent virtual and partly subjective. Four methods stand out:

- Material Flow Analysis (MFA)
- Input-Output Analysis (IOA)
- Life-Cycle Analysis (LCA)
- Ecological Footprint (EF)

Each of these is based on a well-defined structuring element: mass conservation for MFA, measure of industrial inter-dependencies for IOA, identification of all the steps from cradle to grave for LCA, measure of biocapacity demand for EF. The different methods have preferred areas of application. For example, EF is more relevant for analyzing primary production such as agricultural staples, wood, etc. IOA is more focused on whole industrial sectors, while LCA is geared towards end-user products, taken as functional units; finally, primary materials (such as metals), waste and emissions are more easily characterized through MFA. Methodological choices are driven by the type of question one needs to address, data availability and collection method and the spatial scales under consideration. Indeed, data can be used in two different ways: bottom-up or top-down. The bottom-up data is more precise, but in general precludes comprehensiveness; on the contrary, the top-down data is by nature more comprehensive, but is not suited for a detailed, fine-scale analysis of the results.

STEEP is pursuing its research program on this theme with three major goals: 1) Creating a comprehensive database enabling pressure analyses; 2) Developing methodologies and models resolving scaling issues, and developing algorithms allowing us to rigorously and automatically obtain adequate assessments; 3) Providing a synthetic analysis of environmental pressures associated to the major material flows, at various geographic levels (employment catchment area, département and région, for France), with the explicit aim of incorporating this type of information in the public decision process on environmental issues, via specifically designed decision-help procedures.

4.3. Urban economy and land use/land cover changes: assessment of spatial distributions of the pressures

The preceding section was focused on territorial metabolism, in particular on the analysis of supply chains. Here territories are examined with a more prominent emphasis on their spatial dimension, with attention to: the spatial distribution of local pressures previously identified (from a land use point of view), and the modeling of future land use and activity location (from an economic point of view). These two questions correspond to very different modeling strategies: the first one is more statistical in nature, extrapolating future land use from past evolution combined with global territory scenarios; the other one has a more fundamental flavor and focuses on an understanding of the processes driving urbanization. For this, we focus more precisely on the question of household and businesses choices of localization, as well as on spatial fluxes within the territory (transportation of goods and persons). The critical point here is to understand and manage urban sprawl and its environmental effects (GHG emission, loss of arable land, ecosystem fragmentation, and so on).

4.3.1. Land Use/Land Cover Change models (LUCC)

LUCC models are mostly used in environmental sciences, e.g. to evaluate the impact of climate change on agriculture, but they can also be used to analyze urban sprawl. There is a variety of models, static or dynamic, grid- or agent- based, local or global, etc., and with varying degrees of sophistication concerning spatio-temporal analysis or decision structures incorporated in the model.

The models of interest here are statistical in nature but spatially explicit. Following decades of development, they are robust, versatile and mature. In principle, agent-models have a larger potential for representing decision processes, but in practice this advantage results in a loss of universality of the models. Among the most well-known and most mature models, one can mention the CLUE family of models, DINAMIC, or LCM (Land Change Modeler). These models are well described in the literature, and will only be briefly presented here.

These models analyze change in land use in a statistical way; they are structured around three different modules:

- The first module determines the probability of change of pixels of the territory (pixels are typically tens to hundreds of meters in size).
- The second module defines the global changes between the various land uses of interest per time step (usually, a few years), based on global scenarios of evolution of the territory under study. These first two modules are independent of one another.
- The last module distributes changes of land use in an explicit manner, pixel per pixel, at each time step, on the basis of the information provided by the first two modules.

Probabilities of change are calibrated on past evolution, from the differences between two past maps of land use in the more favorable cases, or from a single map otherwise (under the assumption that the logic of occupation changes is the same as the logic of land use at this single date). Such changes are then characterized in a statistical way with the help of modeling variables identified by the modeler as having potential explaining or structuring power (typically, a few to a dozen variables are used for one type of land use change). For example, in the case of urban sprawl, typical explaining factors are the distance to existing urbanized zones or distances to roads and other means of transportation, elements of real estate costs, etc. Global scenarios are quantified in terms of global changes in land use over the whole studied area (e.g., how many hectares are

transformed from agricultural to urban uses in a given number of years, how does this evolve over time...); this is done either from academic expert knowledge, or from information provided by local planning agencies. Whenever feasible, models are validated by comparing the model predictions with actual evolution at a later date. Therefore, such models need from one to three land use maps at different dates for calibration and validation purposes (the larger the number of maps, the more robust and accurate the model). A large array of statistical tools is available in the literature to perform the calibration and validation of the model.

The horizon of projections of such models is limited in time, typically 20-30 years, due to the inherent uncertainty in such models, although they are occasionally used on longer time-scales. Climate change constraints are included, when needed, through scenarios, as it is not in the scope of such models to incorporate ecological processes that may translate climate change constraints into land cover change dynamics. Note that on such short time-scales, climate change is not dominated by the mean climate evolution but by decade variations which average out on longer time-scales and are not modeled in the global climate models used e.g. for IPCC projections for the end of the century; as a consequence, the various IPCC climate scenarios cannot be distinguished on such a short time horizon.

With regard to LUCC, the STEEP team has been involved for five years in the ESNET project whose funding came to a close in July of 2017, but the scientific production of the project is still underway. This project bears on the characterization of local Ecosystem Services networks; the project has been coordinated by LECA (Laboratoire d'Ecologie Alpine), in collaboration with a number of other research laboratories (most notably, IRSTEA Grenoble, besides our team), and in close interaction with a panel of local stakeholders; the scale of interest is typically a landscape (in the ecologic/geographic sense, i.e., a zone a few kilometers to a few tens of kilometers wide). The project aims at developing a generic modelling framework of ecosystem services, and studying their behavior under various scenarios of coupled urban/environment evolution, at the 2030/2040 horizon, under constraints of climate change. The contribution of the STEEP team is centered on the Land Use/Land Cover Change (LUCC) model that is one of the major building blocks of the whole project modelling effort, with the help of an ESNET funded post-doctoral researcher. In the process, areas of conceptual and methodological improvements of statistical LUCC models have been identified; implementing these improvements will be useful for the LUCC community at large, independently of the ESNET project needs.

4.3.2. *Models for Land-Use and Transportation Interactions (LUTI)*

Urban transport systems are intricately linked to urban structure and activities, i.e., to land use. Urbanization generally implies an increased travel demand. Cities have traditionally met this additional demand by extending transportation supply, through new highways and transit lines. In turn, an improvement of the accessibility of ever-farther land leads to an expansion of urban development, resulting in a significant feedback loop between transportation infrastructure and land use, one of the main causes of urban sprawl. Transportation models allow us to address questions generally limited to the impacts of new infrastructures, tolls and other legislation on traffic regulation⁰, on user behavior⁰, or on the environment⁰. LUTI models (Land-Use and Transport Integrated models) can answer a much broader spectrum of issues. For example, they allow us to understand how the localization of households and of economic activities (which generate transportation demand) adapt to changes of transportation supply. They also allow us to assess the impacts of such changes on the increase in real estate value, or more generally on their effects on the economic development of a specific sector or neighborhood. An economic vision interprets all these interactions in terms of equilibrium between demand and supply. Modelling the localization of households and employments (companies) relies on capturing the way stakeholders arbitrate between accessibility, real estate prices, and attractiveness of different areas.

State of the art and operability of LUTI models. The first model that proved able to analyze the interactions between transport and urbanization was developed by Lowry. Since then theories and models have become increasingly complex over time. They can be classified according to different criteria. A first classification

⁰Congestion, cost and time spent for the transport, etc.

⁰Changes in modality choice.

⁰CO2 emissions, air pollution, noise nuisance, etc.

retraces the historic path of these theories and models. They can be associated with one or several of the approaches underlying all present theories: economic base theory and gravity models, Input/Output models and theory of urban rent, and micro-simulations. A second possibility consists in classifying the models according to their aims and means. Significant scientific progress has been made over the last thirty years. Nevertheless, modelling tools remain largely restricted to the academic world. Today, only seven models have at least had one recent application outside academia or are commercialized or potentially marketable, in spite of the important needs expressed by the urban planning agencies: Cube Land, DELTA, MARS, OPUS/UrbanSim, PECAS, TRANUS and Pirandello.

To guide their choice of a modelling framework, users can rely on various criteria such as the strength of the theoretical framework, the quality and the diversity of the available documentation, the accessibility of the models (is the model freely available? is the code open source? is the software regularly updated and compatible with the recent operating systems?), the functionality and friendliness of user interfaces (existence of graphic user interface, possibility of interfacing with Geographic Information Systems), existence of technical assistance, volume and availability of the data required to implement the model, etc. For example, among the seven models mentioned above, only two are open source and mature enough to meet professional standards: TRANUS and UrbanSim⁰. These two models are very different but particularly representative of the main current philosophies and trends in this scientific domain. Their comparison is informative.

STEEP implication in LUTI modelling. As yet, very few local planning authorities make use of these strategic models, mostly because they are difficult to calibrate and validate. Systematic improvement on these two critical steps would clearly increase the level of confidence in their results; these limitations hinder their dissemination in local agencies. One of the major goals of STEEP is therefore to meet the need for better calibration and validation strategies and algorithms. This research agenda lies at the core of our project CITiES (ANR Modèles Numériques) that ended in 2017 with the PhD defense of Thomas Capelle . This work is being partly pursued in the QAMECS project.

As for LUTI modeling, we have been using the TRANUS model since the creation of our team. In this framework we work in close collaboration with AURG⁰, the local urban planning agency of Grenoble (*Agence d'Urbanisme de la Région Grenobloise*) in order to better understand and to improve the relevance of these tools for such territorial agencies.

⁰<http://www.urbansim.org>

⁰<http://www.aurg.org/>

AGORA Project-Team

4. Application Domains

4.1. Smart Cities

One major characteristic of modern societies is that they are prevalently urban. Consequently, the contributions of the Agora team are in particular applied to provide solutions tailored to the emergence of the Internet of Things (IoT) and to Smart Cities applications. A major motivation of the team is the forthcoming explosion of the number of connected devices. In particular, low cost - small data devices are supposed to be densely deployed in our environment, fostering the interest for a convergence of the traditional wireless networking paradigms.

Smart City is a constantly reshaped concept, embracing the future of dense metropolitan areas, with references to efficient and sustainable infrastructure, improving citizens' quality of life and protecting the environment. A consensus on the Smart City philosophy is however that it will be primarily achieved by leveraging a clever integration of Information and Communication Technologies (ICT) in the urban tissue. Indeed, ICTs are enabling an evolution from the current duality between the real world and its digitized counterpart to a continuum in which digital contents and applications are seamlessly interacting with classical infrastructures and services. Smart Cities are often described by the digital services that should be provided which are inherently dependent on dense measurements of the city environment and activities, the collection of these data, their processing into information, and their redistribution. The networking infrastructure plays therefore a critical role in enabling advanced services, in particular the wireless infrastructure supporting density and mobility.

From a wireless networking viewpoint, the digitization of cities can be seen as a paradigm shift extending the Internet of Things (IoT) to a citizen-centric model in order to leverage the massive data collected by pervasive sensors, connected mobiles or fixed devices, and social applications.

AVALON Project-Team

4. Application Domains

4.1. Overview

The AVALON team targets applications with large computing and/or data storage needs, which are still difficult to program, maintain, and deploy. Those applications can be parallel and/or distributed applications, such as large scale simulation applications or code coupling applications. Applications can also be workflow-based as commonly found in distributed systems such as grids or clouds.

The team aims at not being restricted to a particular application field, thus avoiding any spotlight. The team targets different HPC and distributed application fields, which brings use cases with different issues. This will be eased by our various collaborations: the team participates to the INRIA-Illinois Joint Laboratory for Petascale Computing, the Physics, Radiobiology, Medical Imaging, and Simulation French laboratory of excellence, the E-Biothon project, the INRIA large scale initiative Computer and Computational Sciences at Exascale (C2S@Exa), and to BioSyL, a federative research structure about Systems Biology of the University of Lyon. Moreover, the team members have a long tradition of cooperation with application developers such as CERFACS and EDF R&D. Last but not least, the team has a privileged connection with CC-IN2P3 that opens up collaborations, in particular in the astrophysics field.

In the following, some examples of representative applications that we are targeting are presented. In addition to highlighting some application needs, they also constitute some of the use cases that will be used to validate our theoretical results.

4.2. Climatology

The world's climate is currently changing due to the increase of the greenhouse gases in the atmosphere. Climate fluctuations are forecasted for the years to come. For a proper study of the incoming changes, numerical simulations are needed, using general circulation models of a climate system. Simulations can be of different types: HPC applications (*e.g.*, the NEMO framework [28] for ocean modelization), code-coupling applications (*e.g.*, the OASIS coupler [33] for global climate modeling), or workflows (long term global climate modeling).

As for most applications the team is targeting, the challenge is to thoroughly analyze climate-forecasting applications to model their needs in terms of programming model, execution model, energy consumption, data access pattern, and computing needs. Once a proper model of an application has been set up, appropriate scheduling heuristics can be designed, tested, and compared. The team has a long tradition of working with CERFACS on this topic, for example in the LEGO (2006-09) and SPADES (2009-12) French ANR projects.

4.3. Astrophysics

Astrophysics is a major field to produce large volumes of data. For instance, the Vera C. Rubin Observatory (<https://www.vro.org/>) will produce 20 TB of data every night, with the goals of discovering thousands of exoplanets and of uncovering the nature of dark matter and dark energy in the universe. The Square Kilometer Array (<http://www.skatelescope.org/>) produces 9 Tbits/s of raw data. One of the scientific projects related to this instrument called Evolutionary Map of the Universe is working on more than 100 TB of images. The Euclid Imaging Consortium (<https://www.euclid-ec.org/>) will generate 1 PB data per year.

AVALON collaborates with the *Institut de Physique des deux Infinis de Lyon* (IP2I) laboratory on large scale numerical simulations in astronomy and astrophysics. Contributions of the AVALON members have been related to algorithmic skeletons to demonstrate large scale connectivity, the development of procedures for the generation of realistic mock catalogs, and the development of a web interface to launch large cosmological simulations on GRID'5000.

This collaboration, that continues around the topics addressed by the CLUES project (<http://www.clues-project.org>), has been extended thanks to the tight links with the CC-IN2P3. Major astrophysics projects execute part of their computing, and store part of their data on the resources provided by the CC-IN2P3. Among them, we can mention SNFactory, Euclid, or VRO. These applications constitute typical use cases for the research developed in the AVALON team: they are generally structured as workflows and a huge amount of data (from TB to PB) is involved.

4.4. Bioinformatics

Large-scale data management is certainly one of the most important applications of distributed systems in the future. Bioinformatics is a field producing such kinds of applications. For example, DNA sequencing applications make use of MapReduce skeletons.

The AVALON team is a member of BioSyL (<http://www.biosyl.org>), a Federative Research Structure attached to University of Lyon. It gathers about 50 local research teams working on systems biology. Moreover, the team cooperated with the French Institute of Biology and Chemistry of Proteins (IBCP <http://www.ibcp.fr>) in particular through the ANR MapReduce project where the team focuses on a bio-chemistry application dealing with protein structure analysis. AVALON has also started working with the Inria Beagle team (<https://team.inria.fr/beagle/>) on artificial evolution and computational biology as the challenges are around high performance computation and data management.

CTRL-A Project-Team

4. Application Domains

4.1. Self-adaptive and reconfigurable computing systems in HPC and the IoT

We are attacking the problem of designing well-regulated and efficient self-adaptive computing systems by the development of novel strategies for systems management.

The kind of systems we typically target involve relatively coarse grained computation tasks (e.g. image processing or HPC tasks, components or services), assembled in workflows, application dependency graphs, or composites. At that level, there can be parallel and conditional branches, as well as choices that can be made between alternative branches, corresponding to different ways to perform that part of the application. Such tasks can be achieved following a choice of implementations or versions, such as in service oriented approaches. Each implementation has its own characteristics and requirements, e.g., w.r.t. resources consumed and QoS offered. The systems execution infrastructures present heterogeneity, with different computing processors, a variety of peripheral devices (e.g., I/O, video port, accelerators), and different means of communications. This hardware or middleware level also presents adaptation potential e.g., in varying quantities of resources or sleep and stand-by modes.

The kinds of control problems encountered in these adaptive systems concern the navigation in the configurations space defined by choice points at the levels of applications, tasks, and architecture. Upon events or conditions triggering reconfiguration and adaptation, the controller has to choose a next configuration where, on the one hand, all consistency constraints are satisfied w.r.t. dependencies and resources requirements. On the other hand, it has to apply a policy or strategy deciding between correct configurations which one to chose e.g. by optimizing one or more criteria, or by insuring reachability of some later configuration (goal or fallback). This targeted class of computing systems we consider is mid-sized, in the sense that the combinatorial complexity is large enough for manual solving to be impossible, while remaining within the range where supervisory control techniques are tractable. The pace of control is more sporadic, and slower than the instruction-level computation performance within the coarse-grained tasks.

The objectives of CTRL-A will be achieved and evaluated in both of our main application domains, thereby exhibiting their similarities from the point of view of reconfiguration control. A first application domain is High Performance Computing. In this area, we currently focus especially on the management of Dynamic Partial Reconfiguration in FPGA based hardware, at the level of middleware. Here the particular application we consider is, as in our ANR project HPeC starting end of 2015, video image flow processing for smart cameras implemented on DPR FPGAs themselves embedded in drones.

A second general application domain to confront our models is the Internet of Things (IoT), more specifically self-adaptive middleware platforms for Smart Environments, or Industry 4.0 related topics, like SCADA. We focus on providing coordination components and controllers of software components and services, or rule-based middleware platforms. The adaptation problems concern both the functional aspects of the applications in a smart building, and the middleware support deployment and reconfiguration issues. We are considering perspectives concerning self-protection and security.

DANTE Project-Team

4. Application Domains

4.1. Life Science & Health

In parallel to the advances in modern medicine, health sciences and public health policy, epidemic models aided by computer simulations and information technologies offer an increasingly important tool for the understanding of transmission dynamics and of epidemic patterns. The increased computational power and use of Information and Communication Technologies make feasible sophisticated modelling approaches augmented by detailed in vivo data sets, and allow to study a variety of possible scenarios and control strategies, helping and supporting the decision process at the scientific, medical and public health level. The research conducted in the DANTE project finds direct applications in the domain of LSH since modelling approaches crucially depend on our ability to describe the interactions of individuals in the population.

Within PhD work of G. Frusque, we collaborate with Dr. Julien Jung from Hôpital de Neurologie de Bron (HCL) and with Nadine Ravel, DR CNRS (CRNL, INSERM).

4.2. Network Science / Complex networks

In the last ten years the science of complex networks has been assigned an increasingly relevant role in defining a conceptual framework for the analysis of complex systems. Network science is concerned with graphs that map entities and their interactions to nodes and links. For a long time, this mathematical abstraction has contributed to the understanding of real-world systems in physics, computer science, biology, chemistry, social sciences, and economics. Recently, however, enormous amounts of detailed data, electronically collected and meticulously catalogued, have finally become available for scientific analysis and study. This has led to the discovery that most networks describing real world systems show the presence of complex properties and heterogeneities, which cannot be neglected in their topological and dynamical description. This has called forth a major effort in developing the methodology to characterise the topology and temporal behaviour of complex networks, to describe the observed structural and temporal heterogeneities, to detect and measure emerging community structure, to see how the functionality of networks determines their evolving structure, and to determine what kinds of correlations play a role in their dynamics. All these efforts have brought us to a point where the science of complex networks has become advanced enough to help us to disclose the deeper roles of complexity and gain understanding about the behaviour of very complicated systems.

In this endeavour the DANTE project targets the study of dynamically evolving networks, concentrating on questions about the evolving structure and dynamical processes taking place on them. During the last year we developed several projects along these lines concerning three major datasets:

- **Mobile telephony data:** In projects with academic partners and Grandata we performed projects based on two large independent datasets collecting the telephone call and SMS event records for million of anonymised individuals. The datasets record the time and duration of mobile phone interactions and some coarse grained location and demographic data for some users. In addition one of the dataset is coupled with anonymised bank credit information allowing us to study directly the socioeconomic structure of a society and how it determines the communication dynamics and structure of individuals.
- **Skype data:** Together with Skype Labs/STACC and other academic groups we were leading projects in the subject of social spreading phenomena. These projects were based on observations taken from a temporally detailed description of the evolving social network of (anonymised) Skype users registered between 2003 and 2011. This data contains dates of registration and link creation together with gradual information about their location and service usage dynamics.

- Twitter data: In collaboration with ICAR-ENS Lyon we collected a large dataset about the microblogs and communications of millions of Twitter users in the French Twitter space. This data allows us to follow the spreading of fads/opinions/hashtags/ideas and more importantly linguistic features in online communities. The aim of this collaboration is to set the ground for a quantitative framework studying the evolution of linguistic features and dialects in an social-communication space mediated by online social interactions.

4.3. Social Sciences / Epistemology

Political impacts of the internet and of networks begin to be well known (Cambridge Analytica, Russian trolls, etc.). Hence the public at large begins to be aware of the abuses of the leaders of the internet (privacy by firms and advertising, surveillance by states, fake news by activists, etc.). In the same time, on-line exchanges now give scientific estimations of the political life [60] and political sciences begin to consider the internet as a relevant subject of study. As the internet is a *technology*, philosophy is the best approach to understand what socially happens (or can be made) with the internet. We develop it by two ways:

- political philosophy. Some Dante members are working with Triangle laboratory (social sciences, philosophy and politics; Ens de Lyon and CNRS).
- epistemology, because computer sciences discoveries are related with the evolution of science(s): we discovered that, in the case of the internet, political philosophy can do few if not strongly related to epistemology [61]. Epistemological approach is developed in collaboration with Jean Dhombres (who holds a seminar at Enssib: <http://barthes.enssib.fr/cours/Dhombres2018-2019.html> and with Hcéres (new relations between social and exact sciences, cf. point 9.2.8).

This approach should help computer scientists to understand how their research may depend on foreign initiatives and to create new links between social sciences and Inria.

DATAMOVE Project-Team

4. Application Domains

4.1. Data Aware Batch Scheduling

Large scale high performance computing platforms are becoming increasingly complex. Determining efficient allocation and scheduling strategies that can adapt to technological evolutions is a strategic and difficult challenge. We are interested in scheduling jobs in hierarchical and heterogeneous large scale platforms. On such platforms, application developers typically submit their jobs in centralized waiting queues. The job management system aims at determining a suitable allocation for the jobs, which all compete against each other for the available computing resources. Performances are measured using different classical metrics like maximum completion time or slowdown. Current systems make use of very simple (but fast) algorithms that however rely on simplistic platform and execution models, and thus, have limited performances.

For all target scheduling problems we aim to provide both theoretical analysis and complementary analysis through simulations. Achieving meaningful results will require strong improvements on existing models (on power for example) and the design of new approximation algorithms with various objectives such as stretch, reliability, throughput or energy consumption, while keeping in focus the need for a low-degree polynomial complexity.

4.1.1. Algorithms

The most common batch scheduling policy is to consider the jobs according to the First Come First Served order (FCFS) with backfilling (BF). BF is the most widely used policy due to its easy and robust implementation and known benefits such as high system utilization. It is well-known that this strategy does not optimize any sophisticated function, but it is simple to implement and it guarantees that there is no starvation (i.e. every job will be scheduled at some moment).

More advanced algorithms are seldom used on production platforms due to both the gap between theoretical models and practical systems and speed constraints. When looking at theoretical scheduling problems, the generally accepted goal is to provide polynomial algorithms (in the number of submitted jobs and the number of involved computing units). However, with millions of processing cores where every process and data transfer have to be individually scheduled, polynomial algorithms are prohibitive as soon as the polynomial degree is too large. The model of *parallel tasks* simplifies this problem by bundling many threads and communications into single boxes, either rigid, rectangular or malleable. Especially malleable tasks capture the dynamicity of the execution. Yet these models are ill-adapted to heterogeneous platforms, as the running time depends on more than simply the number of allotted resources, and some of the common underlying assumptions on the speed-up functions (such as monotony or concavity) are most often only partially verified.

In practice, the job execution times depend on their allocation (due to communication interferences and heterogeneity in both computation and communication), while theoretical models of parallel jobs usually consider jobs as black boxes with a fixed (maximum) execution time. Though interesting and powerful, the classical models (namely, synchronous PRAM model, delay, LogP) and their variants (such as hierarchical delay), are not well-suited to large scale parallelism on platforms where the cost of moving data is significant, non uniform and may change over time. Recent studies are still refining such models in order to take into account communication contentions more accurately while remaining tractable enough to provide a useful tool for algorithm design.

Today, all algorithms in use in production systems are oblivious to communications. One of our main goals is to **design a new generation of scheduling algorithms fitting more closely job schedules according to platform topologies.**

4.1.2. Locality Aware Allocations

Recently, we developed modifications of the standard back-filling algorithm taking into account platform topologies. The proposed algorithms take into account locality and contiguity in order to hide communication patterns within parallel tasks. The main result here is to establish good lower bounds and small approximation ratios for policies respecting the locality constraints. The algorithms work in an online fashion, improving the global behavior of the system while still keeping a low running time. These improvements rely mainly on our past experience in designing approximation algorithms. Instead of relying on complex networking models and communication patterns for estimating execution times, the communications are disconnected from the execution time. Then, the scheduling problem leads to a trade-off: optimizing locality of communications on one side and a performance objective (like the makespan or stretch) on the other side.

In the perspective of taking care of locality, other ongoing works include the study of schedulers for platforms whose interconnection network is a static structured topology (like the 3D-torus of the BlueWaters platform we work on in collaboration with the Argonne National Laboratory). One main characteristic of this 3D-torus platform is to provide I/O nodes at specific locations in the topology. Applications generate and access specific data and are thus bounded to specific I/O nodes. Resource allocations are constrained in a strong and unusual way. This problem is close for actual hierarchical platforms. The scheduler needs to compute a schedule such that I/O nodes requirements are filled for each application while at the same time avoiding communication interferences. Moreover, extra constraints can arise for applications requiring accelerators that are gathered on the nodes at the edge of the network topology.

While current results are encouraging, they are however limited in performance by the low amount of information available to the scheduler. We look forward to extend ongoing work by progressively increasing application and network knowledge (by technical mechanisms like profiling or monitoring or by more sophisticated methods like learning). It is also important to anticipate on application resource usage in terms of compute units, memory as well as network and I/Os to efficiently schedule a mix of applications with different profiles. For instance, a simple solution is to partition the jobs as "communication intensive" or "low communications". Such a tag could be achieved by the users themselves or obtained by learning techniques. We could then schedule low communications jobs using leftover spaces while taking care of high communication jobs. More sophisticated options are possible, for instance those that use more detailed communication patterns and networking models. Such options would leverage the work proposed in Section 4.2 for gathering application traces.

4.1.3. Data-Centric Processing

Exascale computing is shifting away from the traditional compute-centric models to a more data-centric one. This is driven by the evolving nature of large scale distributed computing, no longer dominated by pure computations but also by the need to handle and analyze large volumes of data. These data can be large databases of results, data streamed from a running application or another scientific instrument (collider for instance). These new workloads call for specific resource allocation strategies.

Data movements and storage are expected to be a major energy and performance bottleneck on next generation platforms. Storage architectures are also evolving, the standard centralized parallel file system being complemented with local persistent storage (Burst Buffers, NVRAM). Thus, one data producer can stage data on some nodes' local storage, requiring to schedule close by the associated analytics tasks to limit data movements. This kind of configuration, often referred as *in-situ analytics*, is expected to become common as it enables to switch from the traditional I/O intensive workflow (batch-processing followed by *post mortem* analysis and visualization) to a more storage conscious approach where data are processed as closely as possible to where and when they are produced (in-situ processing is addressed in details in section 4.3). By reducing data movements and scheduling the extra processing on resources not fully exploited yet, in-situ processing is expected to have also a significant positive energetic impact. Analytics codes can be executed in the same nodes than the application, often on dedicated cores commonly called helper cores, or on dedicated nodes called staging nodes. The results are either forwarded to the users for visualization or saved to disk through I/O nodes. In-situ analytics can also take benefit of node local disks or burst buffers to reduce data movements.

Future job scheduling strategies should take into account in-situ processes in addition to the job allocation to optimize both energy consumption and execution time. On the one hand, this problem can be reduced to an allocation problem of extra asynchronous tasks to idle computing units. But on the other hand, embedding analytics in applications brings extra difficulties by making the application more heterogeneous and imposing more constraints (data affinity) on the required resources. Thus, the main point here is to develop efficient algorithms for dealing with heterogeneity without increasing the global computational cost.

4.1.4. Learning

Another important issue is to adapt the job management system to deal with the bad effects of uncertainties, which may be catastrophic in large scale heterogeneous HPC platforms (jobs delayed arbitrarily far or jobs killed). A natural question is then: *is it possible to have a good estimation of the job and platform parameters in order to be able to obtain a better scheduling ?* Many important parameters (like the number or type of required resources or the estimated running time of the jobs) are asked to the users when they submit their jobs. However, some of these values are not accurate and in many cases, they are not even provided by the end-users. In DataMove, we propose to study new methods for a better prediction of the characteristics of the jobs and their execution in order to improve the optimization process. In particular, the methods well-studied in the field of big data (in supervised Machine Learning, like classical regression methods, Support Vector Methods, random forests, learning to rank techniques or deep learning) could and must be used to improve job scheduling in large scale HPC platforms. This topic received a great attention recently in the field of parallel and distributed processing. A preliminary study has been done recently by our team with the target of predicting the job running times (called wall times). We succeeded to improve significantly in average the reference EASY Back Filling algorithm by estimating the wall time of the jobs, however, this method leads to big delay for the stretch of few jobs. Even if we succeed in determining more precisely hidden parameters, like the wall time of the jobs, this is not enough to determine an optimized solution. The shift is not only to learn on dedicated parameters but also on the scheduling policy. The data collected from the accounting and profiling of jobs can be used to better understand the needs of the jobs and through learning to propose adaptations for future submissions. The goal is to propose extensions to further improve the job scheduling and improve the performance and energy efficiency of the application. For instance preference learning may enable to compute on-line new priorities to back-fill the ready jobs.

4.1.5. Multi-objective Optimization

Several optimization questions that arise in allocation and scheduling problems lead to the study of several objectives at the same time. The goal is then not a single optimal solution, but a more complicated mathematical object that captures the notion of trade-off. In broader terms, the goal of multi-objective optimization is not to externally arbitrate on disputes between entities with different goals, but rather to explore the possible solutions to highlight the whole range of interesting compromises. A classical tool for studying such multi-objective optimization problems is to use *Pareto curves*. However, the full description of the Pareto curve can be very hard because of both the number of solutions and the hardness of computing each point. Addressing this problem will opens new methodologies for the analysis of algorithms.

To further illustrate this point here are three possible case studies with emphasis on conflicting interests measured with different objectives. While these cases are good representatives of our HPC context, there are other pertinent trade-offs we may investigate depending on the technology evolution in the coming years. This enumeration is certainly not limitative.

Energy versus Performance. The classical scheduling algorithms designed for the purpose of performance can no longer be used because performance and energy are contradictory objectives to some extent. The scheduling problem with energy becomes a multi-objective problem in nature since the energy consumption should be considered as equally important as performance at exascale. A global constraint on energy could be a first idea for determining trade-offs but the knowledge of the Pareto set (or an approximation of it) is also very useful.

Administrators versus application developers. Both are naturally interested in different objectives: In current algorithms, the performance is mainly computed from the point of view of administrators, but the users should be in the loop since they can give useful information and help to the construction of better schedules. Hence, we face again a multi-objective problem where, as in the above case, the approximation of the Pareto set provides the trade-off between the administrator view and user demands. Moreover, the objectives are usually of the same nature. For example, *max stretch* and *average stretch* are two objectives based on the slowdown factor that can interest administrators and users, respectively. In this case the study of the norm of stretch can be also used to describe the trade-off (recall that the L_1 -norm corresponds to the average objective while the L_∞ -norm to the max objective). Ideally, we would like to design an algorithm that gives good approximate solutions at the same time for all norms. The L_2 or L_3 -norm are useful since they describe the performance of the whole schedule from the administrator point of view as well as they provide a fairness indication to the users. The hard point here is to derive theoretical analysis for such complicated tools.

Resource Augmentation. The classical resource augmentation models, i.e. speed and machine augmentation, are not sufficient to get good results when the execution of jobs cannot be frequently interrupted. However, based on a resource augmentation model recently introduced, where the algorithm may reject a small number of jobs, some members of our team have given the first interesting results in the non-preemptive direction. In general, resource augmentation can explain the intuitive good behavior of some greedy algorithms while, more interestingly, it can give ideas for new algorithms. For example, in the rejection context we could dedicate a small number of nodes for the usually problematic rejected jobs. Some initial experiments show that this can lead to a schedule for the remaining jobs that is very close to the optimal one.

4.2. Empirical Studies of Large Scale Platforms

Experiments or realistic simulations are required to take into account the impact of allocations and assess the real behavior of scheduling algorithms. While theoretical models still have their interest to lay the groundwork for algorithmic designs, the models are necessarily reflecting a purified view of the reality. As transferring our algorithm in a more practical setting is an important part of our creed, we need to ensure that the theoretical results found using simplified models can really be transposed to real situations. On the way to exascale computing, large scale systems become harder to study, to develop or to calibrate because of the costs in both time and energy of such processes. It is often impossible to convince managers to use a production cluster for several hours simply to test modifications in the RJMS. Moreover, as the existing RJMS production systems need to be highly reliable, each evolution requires several real scale test iterations. The consequence is that scheduling algorithms used in production systems are mostly outdated and not customized correctly. To circumvent this pitfall, we need to develop tools and methodologies for alternative empirical studies, from analysis of workload traces, to job models, simulation and emulation with reproducibility concerns.

4.2.1. Workload Traces with Resource Consumption

Workload traces are the base element to capture the behavior of complete systems composed of submitted jobs, running applications, and operating tools. These traces must be obtained on production platforms to provide relevant and representative data. To get a better understanding of the use of such systems, we need to look at both, how the jobs interact with the job management system, and how they use the allocated resources. We propose a general workload trace format that adds jobs resource consumption to the commonly used SWF⁰ workload trace format. This requires to instrument the platforms, in particular to trace resource consumptions like CPU, data movements at memory, network and I/O levels, with an acceptable performance impact. In a previous work we studied and proposed a dedicated job monitoring tool whose impact on the system has been measured as lightweight (0.35% speed-down) with a 1 minute sampling rate. Other tools also explore job monitoring, like TACC Stats. A unique feature from our tool is its ability to monitor distinctly jobs sharing common nodes.

⁰Standard Workload Format: <http://www.cs.huji.ac.il/labs/parallel/workload/swf.html>

Collected workload traces with jobs resource consumption will be publicly released and serve to provide data for works presented in Section 4.1. The trace analysis is expected to give valuable insights to define models encompassing complex behaviours like network topology sensitivity, network congestion and resource interferences.

We expect to join efforts with partners for collecting quality traces (ATOS/Bull, Ciment meso center, Joint Laboratory on Extreme Scale Computing) and will collaborate with the Inria team POLARIS for their analysis.

4.2.2. Simulation

Simulations of large scale systems are faster by multiple orders of magnitude than real experiments. Unfortunately, replacing experiments with simulations is not as easy as it may sound, as it brings a host of new problems to address in order to ensure that the simulations are closely approximating the execution of typical workloads on real production clusters. Most of these problems are actually not directly related to scheduling algorithms assessment, in the sense that the workload and platform models should be defined independently from the algorithm evaluations, in order to ensure a fair assessment of the algorithms' strengths and weaknesses. These research topics (namely platform modeling, job models and simulator calibration) are addressed in the other subsections.

We developed an open source platform simulator within DataMove (in conjunction with the OAR development team) to provide a widely distributable test bed for reproducible scheduling algorithm evaluation. Our simulator, named Batsim, allows to simulate the behavior of a computational platform executing a workload scheduled by any given scheduling algorithm. To obtain sound simulation results and to broaden the scope of the experiments that can be done thanks to Batsim, we did not chose to create a (necessarily limited) simulator from scratch, but instead to build on top of the SimGrid simulation framework.

To be open to as many batch schedulers as possible, Batsim decouples the platform simulation and the scheduling decisions in two clearly-separated software components communicating through a complete and documented protocol. The Batsim component is in charge of simulating the computational resources behaviour whereas the scheduler component is in charge of taking scheduling decisions. The scheduler component may be both a resource and a job management system. For jobs, scheduling decisions can be to execute a job, to delay its execution or simply to reject it. For resources, other decisions can be taken, for example to change the power state of a machine i.e. to change its speed (in order to lower its energy consumption) or to switch it on or off. This separation of concerns also enables interfacing with potentially any commercial RJMS, as long as the communication protocol with Batsim is implemented. A proof of concept is already available with the OAR RJMS.

Using this test bed opens new research perspectives. It allows to test a large range of platforms and workloads to better understand the real behavior of our algorithms in a production setting. In turn, this opens the possibility to tailor algorithms for a particular platform or application, and to precisely identify the possible shortcomings of the theoretical models used.

4.2.3. Job and Platform Models

The central purpose of the Batsim simulator is to simulate job behaviors on a given target platform under a given resource allocation policy. Depending on the workload, a significant number of jobs are parallel applications with communications and file system accesses. It is not conceivable to simulate individually all these operations for each job on large platforms with their associated workload due to implied simulation complexity. The challenge is to define a coarse grain job model accurate enough to reproduce parallel application behavior according to the target platform characteristics. We will explore models similar to the BSP (Bulk Synchronous Program) approach that decomposes an application in local computation supersteps ended by global communications and a global synchronization. The model parameters will be established by means of trace analysis as discussed previously, but also by instrumenting some parallel applications to capture communication patterns. This instrumentation will have a significant impact on the concerned application performance, restricting its use to a few applications only. There are a lot of recurrent applications executed on HPC platform, this fact will help to reduce the required number of instrumentations and captures. To assign

each job a model, we are considering to adapt the concept of application signatures as proposed in. Platform models and their calibration are also required. Large parts of these models, like those related to network, are provided by Simgrid. Other parts as the filesystem and energy models are comparatively recent and will need to be enhanced or reworked to reflect the HPC platform evolutions. These models are then generally calibrated by running suitable benchmarks.

4.2.4. Emulation and Reproducibility

The use of coarse models in simulation implies to set aside some details. This simplification may hide system behaviors that could impact significantly and negatively the metrics we try to enhance. This issue is particularly relevant when large scale platforms are considered due to the impossibility to run tests at nominal scale on these real platforms. A common approach to circumvent this issue is the use of emulation techniques to reproduce, under certain conditions, the behavior of large platforms on smaller ones. Emulation represents a natural complement to simulation by allowing to execute directly large parts of the actual evaluated software and system, but at the price of larger compute times and a need for more resources. The emulation approach was chosen in to compare two job management systems from workload traces of the CURIE supercomputer (80000 cores). The challenge is to design methods and tools to emulate with sufficient accuracy the platform and the workload (data movement, I/O transfers, communication, applications interference). We will also intend to leverage emulation tools like Distem from the MADYNES team. It is also important to note that the Batsim simulator also uses emulation techniques to support the core scheduling module from actual RJMS. But the integration level is not the same when considering emulation for larger parts of the system (RJMS, compute node, network and filesystem).

Replaying traces implies to prepare and manage complex software stacks including the OS, the resource management system, the distributed filesystem and the applications as well as the tools required to conduct experiments. Preparing these stacks generate specific issues, one of the major one being the support for reproducibility. We propose to further develop the concept of reconstructability to improve experiment reproducibility by capturing the build process of the complete software stack. This approach ensures reproducibility over time better than other ways by keeping all data (original packages, build recipe and Kameleon engine) needed to build the software stack.

In this context, the Grid'5000 (see Sec. 6.4) experimentation infrastructure that gives users the control on the complete software stack is a crucial tool for our research goals. We will pursue our strong implication in this infrastructure.

4.3. Integration of High Performance Computing and Data Analytics

Data produced by large simulations are traditionally handled by an I/O layer that moves them from the compute cores to the file system. Analysis of these data are performed after reading them back from files, using some domain specific codes or some scientific visualisation libraries like VTK. But writing and then reading back these data generates a lot of data movements and puts under pressure the file system. To reduce these data movements, **the in situ analytics paradigm proposes to process the data as closely as possible to where and when the data are produced**. Some early solutions emerged either as extensions of visualisation tools or of I/O libraries like ADIOS. But significant progresses are still required to provide efficient and flexible high performance scientific data analysis tools. Integrating data analytics in the HPC context will have an impact on resource allocation strategies, analysis algorithms, data storage and access, as well as computer architectures and software infrastructures. But this paradigm shift imposed by the machine performance also sets the basis for a deep change on the way users work with numerical simulations. The traditional workflow needs to be reinvented to make HPC more user-centric, more interactive and turn HPC into a commodity tool for scientific discovery and engineering developments. In this context DataMove aims at investigating programming environments for in situ analytics with a specific focus on task scheduling in particular, to ensure an efficient sharing of resources with the simulation.

4.3.1. Programming Model and Software Architecture

In situ creates a tighter loop between the scientist and her/his simulation. As such, an in situ framework needs to be flexible to let the user define and deploy its own set of analysis. A manageable flexibility requires to favor simplicity and understandability, while still enabling an efficient use of parallel resources. Visualization libraries like VTK or Visit, as well as domain specific environments like VMD have initially been developed for traditional post-mortem data analysis. They have been extended to support in situ processing with some simple resource allocation strategies but the level of performance, flexibility and ease of use that is expected requires to rethink new environments. There is a need to develop a middleware and programming environment taking into account in its foundations this specific context of high performance scientific analytics.

Similar needs for new data processing architectures occurred for the emerging area of Big Data Analytics, mainly targeted to web data on cloud-based infrastructures. Google Map/Reduce and its successors like Spark or Stratosphere/Flink have been designed to match the specific context of efficient analytics for large volumes of data produced on the web, on social networks, or generated by business applications. These systems have mainly been developed for cloud infrastructures based on commodity architectures. They do not leverage the specifics of HPC infrastructures. Some preliminary adaptations have been proposed for handling scientific data in a HPC context. However, these approaches do not support in situ processing.

Following the initial development of FlowVR, our middleware for in situ processing, we will pursue our effort to develop a programming environment and software architecture for high performance scientific data analytics. Like FlowVR, the map/reduce tools, as well as the machine learning frameworks like TensorFlow, adopted a dataflow graph for expressing analytics pipe-lines. We are convinced that this dataflow approach is both easy to understand and yet expresses enough concurrency to enable efficient executions. The graph description can be compiled towards lower level representations, a mechanism that is intensively used by Stratosphere/Flink for instance. Existing in situ frameworks, including FlowVR, inherit from the HPC way of programming with a thinner software stack and a programming model close to the machine. Though this approach enables to program high performance applications, this is usually too low level to enable the scientist to write its analysis pipe-line in a short amount of time. The data model, i.e. the data semantics level accessible at the framework level for error check and optimizations, is also a fundamental aspect of such environments. The key/value store has been adopted by all map/reduce tools. Except in some situations, it cannot be adopted as such for scientific data. Results from numerical simulations are often more structured than web data, associated with acceleration data structures to be processed efficiently. We will investigate data models for scientific data building on existing approaches like Adios or DataSpaces.

4.3.2. Resource Sharing

To alleviate the I/O bottleneck, the in situ paradigm proposes to start processing data as soon as made available by the simulation, while still residing in the memory of the compute node. In situ processings include data compression, indexing, computation of various types of descriptors (1D, 2D, images, etc.). Per se, reducing data output to limit I/O related performance drops or keep the output data size manageable is not new. Scientists have relied on solutions as simple as decreasing the frequency of result savings. In situ processing proposes to move one step further, by providing a full fledged processing framework enabling scientists to more easily and thoroughly manage the available I/O budget.

The most direct way to perform in situ analytics is to inline computations directly in the simulation code. In this case, in situ processing is executed in sequence with the simulation that is suspended meanwhile. Though this approach is direct to implement and does not require complex framework environments, it does not enable to overlap analytics related computations and data movements with the simulation execution, preventing to efficiently use the available resources. Instead of relying on this simple time sharing approach, several works propose to rely on space sharing where one or several cores per node, called *helper cores*, are dedicated to analytics. The simulation responsibility is simply to handle a copy of the relevant data to the node-local in situ processes, both codes being executed concurrently. This approach often lead to significantly better performance than in-simulation analytics.

For a better isolation of the simulation and in situ processes, one solution consists in offloading in situ tasks from the simulation nodes towards extra dedicated nodes, usually called *staging nodes*. These computations are said to be performed *in-transit*. But this approach may not always be beneficial compared to processing on simulation nodes due to the costs of moving the data from the simulation nodes to the staging nodes.

FlowVR enables to mix these different resources allocation strategies for the different stages of an analytics pipe-line. Based on a component model, the scientist designs analytics workflows by first developing processing components that are next assembled in a dataflow graph through a Python script. At runtime the graph is instantiated according to the execution context, FlowVR taking care of deploying the application on the target architecture, and of coordinating the analytics workflows with the simulation execution.

But today the choice of the resource allocation strategy is mostly ad-hoc and defined by the programmer. We will investigate solutions that enable a cooperative use of the resource between the analytics and the simulation with minimal hints from the programmer. In situ processings inherit from the parallelization scale and data distribution adopted by the simulation, and must execute with minimal perturbations on the simulation execution (whose actual resource usage is difficult to know a priori). We need to develop adapted scheduling strategies that operate at compile and run time. Because analysis are often data intensive, such solutions must take into consideration data movements, a point that classical scheduling strategies designed first for compute intensive applications often overlook. We expect to develop new scheduling strategies relying on the methodologies developed in Sec. 4.1.5 . Simulations as well as analysis are iterative processes exposing a strong spatial and temporal coherency that we can take benefit of to anticipate their behavior and then take more relevant resources allocation strategies, possibly based on advanced learning algorithms or as developed in Section 4.1 .

In situ analytics represent a specific workload that needs to be scheduled very closely to the simulation, but not necessarily active during the full extent of the simulation execution and that may also require to access data from previous runs (stored in the file system or on specific burst-buffers). Several users may also need to run concurrent analytics pipe-lines on shared data. This departs significantly from the traditional batch scheduling model, motivating the need for a more elastic approach to resource provisioning. These issues will be conjointly addressed with research on batch scheduling policies (Sec. 4.1).

4.3.3. Co-Design with Data Scientists

Given the importance of users in this context, it is of primary importance that in situ tools be co-designed with advanced users, even if such multidisciplinary collaborations are challenging and require constant long term investments to learn and understand the specific practices and expectations of the other domain.

We will tightly collaborate with scientists of some application domains, like molecular dynamics or fluid simulation, to design, develop, deploy and assess in situ analytics scenarios, as already done with Marc Baaden, a computational biologist from LBT.

MARACAS Team

4. Application Domains

4.1. 5G, 6G, and beyond

The fifth generation (5G) broadens the usage of cellular networks but requires new features, typically very high rates, high reliability, ultra low latency, for immersive applications, tactile internet, M2M communications.

From the technical side, new elements such as millimeter waves, massive MIMO, massive access are under evaluation. The initial 5G standard validated in 2019, is finally not really disruptive with respect to the 4G and the clear breakthrough is not there yet. The ideal network architecture for billions of devices in the general context of Internet of Things, is not well established and the debate still exists between several proposals such as NB-IoT, Sigfox, Lora. We are developing a deep understanding of these techniques, in collaboration with major actors (Orange Labs, Nokia Bell Labs, Sequans, Sigfox) and we want to be able to evaluate, to compare and to propose evolutions of these standards with an independent point of view.

This is why we are interested in developing partnerships with major industries, access providers but also with service providers to position our research in a joint optimization of the network infrastructure and the data services, from a theoretical perspective as well as from experimentation.

4.2. Energy sustainability

The energy footprint and from a more general perspective, the sustainability of wireless cellular networks and wireless connectivity is somehow questionable.

We develop our models and analysis with a careful consideration of the energy footprint : sleeping modes, power adaptation, interference reduction, energy gathering, ... many techniques can be optimized to reduce the energetic impact of wireless connectivity. In a *computing networks* approach, considering simultaneously transmission, storage and computation constraints may help to reduce drastically the overall energy footprint.

4.3. Smart building, smart cities, smart environments

Smart environments rely on the deployment of many sensors and actuators allowing to create interactions between the twinned virtual and real worlds. These smart environments (e.g. smart building) are for us an ideal playground to develop new models based on information theory and estimation theory to optimize the network architecture including storage, transmission, computation at the right place.

Our work can be seen as the dark side of cloud/edge computing. In collaboration with other teams expert in distributed computing or middleware (typically at CITIlab, with the team Dynamid of Frédéric Le Mouel) and in the framework of the chaire SPIE/ICS-INSA Lyon, we want to optimize the mechanisms associated to these technologies : in a multi-constrained approach, we want to design new distributed algorithms appropriate for large scale smart environments.

4.4. Machine learning based radio

During the first 6G wireless meeting which was held in Lapland, Finland in March 2019, machine learning (ML) was clearly identified as one of the most promising breakthroughs for future 6G wireless systems expected to be in use around 2030 (<https://www.6gsummit.com/>). The research community is entirely leveraging the international ML tsunami. We strongly believe that the paradigm of wireless networks is moving toward to a new era. Our view is supported by the fact that artificial Intelligence (AI) in wireless communications is not new at all. The telecommunications industry has been seeking for 20 years to reduce the operational complexity of communication networks in order to simplify constraints and to reduce costs on deployments. This obviously relies on data-driven techniques allowing the network to self-tune its own parameters. Over the successive 3GPP standard releases, more and more sophisticated network control has been introduced. This has supported increasing flexibility and further self-optimization capabilities for radio resource management (RRM) as well as for network parameters optimization.

We target the following key elements :

- Obtaining data from experimental scenarios, at the lowest level (baseband I/Q signals) in multi-user scenarios (based upon FIT/CorteXlab).
- Developing a framework and algorithms for deep learning based radio.
- Developing new reinforcement learning techniques in high dimensional state-action spaces.
- Embedding NN structures on radio devices (FPGA or m-controllers) and in FIT/CorteXlab.
- Evaluating the gap between these algorithms and fundamental limits from information theory.
- Building an application scenario in a smart environment to experiment a fully cross-layer design (e.g. within a smart-building context, how could a set of object could learn their protocols efficiently ?)

4.5. Molecular communications

Many communication mechanisms are based on acoustic or electromagnetic propagation; however, the general theory of communication is much more widely applicable. One recent proposal is molecular communication, where information is encoded in the type, quantity, or time or release of molecules. This perspective has interesting implications for the understanding of biochemical processes and also chemical-based communication where other signaling schemes are not easy to use (e.g., in mines). Our work in this area focuses on two aspects: (i) the fundamental limits of communication (i.e., how much data can be transmitted within a given period of time); and (ii) signal processing strategies which can be implemented by circuits built from chemical reaction-diffusion systems.

A novel perspective introduced within our work is the incorporation of coexistence constraints. That is, we consider molecular communication in a crowded biochemical environment where communication should not impact pre-existing behavior of the environment. This has lead to new connections with communication subject to security constraints as well as the stability theory of stochastic chemical reaction-diffusion systems and systems of partial differential equations which provide deterministic approximations.

POLARIS Project-Team

4. Application Domains

4.1. Large Computing Infrastructures

Supercomputers typically comprise thousands to millions of multi-core CPUs with GPU accelerators interconnected by complex interconnection networks that are typically structured as an intricate hierarchy of network switches. Capacity planning and management of such systems not only raises challenges in term of computing efficiency but also in term of energy consumption. Most legacy (SPMD) applications struggle to benefit from such infrastructure since the slightest failure or load imbalance immediately causes the whole program to stop or at best to waste resources. To scale and handle the stochastic nature of resources, these applications have to rely on dynamic runtimes that schedule computations and communications in an opportunistic way. Such evolution raises challenges not only in terms of programming but also in terms of observation (complexity and dynamicity prevents experiment reproducibility, intrusiveness hinders large scale data collection, ...) and analysis (dynamic and flexible application structures make classical visualization and simulation techniques totally ineffective and require to build on *ad hoc* information on the application structure).

4.2. Next-Generation Wireless Networks

Considerable interest has arisen from the seminal prediction that the use of multiple-input, multiple-output (MIMO) technologies can lead to substantial gains in information throughput in wireless communications, especially when used at a massive level. In particular, by employing multiple inexpensive service antennas, it is possible to exploit spatial multiplexing in the transmission and reception of radio signals, the only physical limit being the number of antennas that can be deployed on a portable device. As a result, the wireless medium can accommodate greater volumes of data traffic without requiring the reallocation (and subsequent re-regulation) of additional frequency bands. In this context, throughput maximization in the presence of interference by neighboring transmitters leads to games with convex action sets (covariance matrices with trace constraints) and individually concave utility functions (each user's Shannon throughput); developing efficient and distributed optimization protocols for such systems is one of the core objectives of Theme 5.

Another major challenge that occurs here is due to the fact that the efficient physical layer optimization of wireless networks relies on perfect (or close to perfect) channel state information (CSI), on both the uplink and the downlink. Due to the vastly increased computational overhead of this feedback – especially in decentralized, small-cell environments – the ongoing transition to fifth generation (5G) wireless networks is expected to go hand-in-hand with distributed learning and optimization methods that can operate reliably in feedback-starved environments. Accordingly, one of POLARIS' application-driven goals will be to leverage the algorithmic output of Theme 5 into a highly adaptive resource allocation framework for next-generation wireless systems that can effectively "learn in the dark", without requiring crippling amounts of feedback.

4.3. Energy and Transportation

Smart urban transport systems and smart grids are two examples of collective adaptive systems. They consist of a large number of heterogeneous entities with decentralised control and varying degrees of complex autonomous behaviour. We develop an analysis tools to help to reason about such systems. Our work relies on tools from fluid and mean-field approximation to build decentralized algorithms that solve complex optimization problems. We focus on two problems: decentralized control of electric grids and capacity planning in vehicle-sharing systems to improve load balancing.

4.4. Social Computing Systems

Social computing systems are online digital systems that use personal data of their users at their core to deliver personalized services directly to the users. They are omnipresent and include for instance recommendation systems, social networks, online medias, daily apps, etc. Despite their interest and utility for users, these systems pose critical challenges of privacy, security, transparency, and respect of certain ethical constraints such as fairness. Solving these challenges involves a mix of measurement and/or audit to understand and assess issues, and modeling and optimization to propose and calibrate solutions.

ROMA Project-Team

4. Application Domains

4.1. Applications of sparse direct solvers

Sparse direct (e.g., multifrontal solvers that we develop) solvers have a wide range of applications as they are used at the heart of many numerical methods in computational science: whether a model uses finite elements or finite differences, or requires the optimization of a complex linear or nonlinear function, one often ends up solving a system of linear equations involving sparse matrices. There are therefore a number of application fields, among which some of the ones cited by the users of the sparse direct solver MUMPS are: structural mechanics, seismic modeling, biomechanics, medical image processing, tomography, geophysics, electromagnetism, fluid dynamics, econometric models, oil reservoir simulation, magneto-hydro-dynamics, chemistry, acoustics, glaciology, astrophysics, circuit simulation, and work on hybrid direct-iterative methods.

SOCRATE Project-Team (section vide)

CHROMA Project-Team

4. Application Domains

4.1. Introduction

Applications in Chroma are organized in two main domains : **i) Future cars and transportation systems and ii) Services robotics**. These domains correspond to the experimental fields initiated in Grenoble (eMotion team) and in Lyon (CITI lab). However, the scientific objectives described in the previous sections are intended to apply equally to both applicative domains. Even our work on Bayesian Perception is today applied to the intelligent vehicle domain, we aim to generalize to any mobile robots. The same remark applies to the work on multi-agent decision making. We aim to apply algorithms to any fleet of mobile robots (service robots, connected vehicles, UAVs). This is the philosophy of the team since its creation.



Figure 4. Most of the Chroma platforms: the Pepper robot, a fleet of (22) Turtlebot 2, one of the 4 Bebop drones and the equipped Toyota Lexus.

4.2. Future cars and transportation systems

Thanks to the introduction of new sensor and ICT technologies in cars and in mass transportation systems, and also to the pressure of economical and security requirements of our modern society, this application domain is quickly changing. Various technologies are currently developed by both research and industrial laboratories. These technologies are progressively arriving at maturity, as it is witnessed by the results of large scale experiments and challenges such as the Google's car project and several future products announcements made by the car industry. Moreover, the legal issue starts to be addressed in USA (see for instance the recent laws in Nevada and in California authorizing autonomous vehicles on roads) and in several other countries (including France).

In this context, we are interested in the development of ADAS⁰ systems aimed at improving comfort and safety of the cars users (e.g., ACC, emergency braking, danger warnings), and of Fully Autonomous Driving functions for controlling the displacements of private or public vehicles in some particular driving situations and/or in some equipped areas (e.g., automated car parks or captive fleets in downtown centers or private sites).

⁰ Advanced Driver Assistance Systems

Since about 8 years, we are collaborating with Toyota and with Renault-Nissan on these applications (bilateral contracts, PhD Theses, shared patents), but also recently with Volvo group (PhD thesis started in 2016). We are also strongly involved (since 2012) in the innovation project Perfect then now Security for autonomous vehicle of the IRT⁰ Nanoelec (transportation domain). In 2016, we have been awarded a European H2020 ECSEL project⁰ involving major European automotive constructors and car suppliers. In this project, Chroma is focusing on the embedded perception component (models and algorithms, including the certification issue), in collaboration with Renault, Valeo and also with the Inria team TAMIS (Rennes). Chroma is also involved in the ANR project "Valet" (2015-2018) coordinated by the Inria team RITS (Rocquencourt), dealing with automatic redistribution of car-sharing vehicles and parking valet; Chroma is involved in the pedestrian-vehicle interaction for a safe navigation.

In this context, Chroma has two experimental vehicles equipped with various sensors (a Toyota Lexus and a Renault Zoe, see Fig. 4 and Fig. 2 .b), which are maintained by Inria-SED⁰ and that allow the team to perform experiments in realistic traffic conditions (Urban, road and highway environments). The Zoe car has been automated in December 2016, through our collaboration with the team of P. Martinet (IRCCyN Lab, Nantes), that allow new experiments in the team.

4.3. Services robotics

Service robotics is an application domain quickly emerging, and more and more industrial companies (e.g., IS-Robotics, Samsung, LG) are now commercializing service and intervention robotics products such as vacuum cleaner robots, drones for civil or military applications, entertainment robots ... One of the main challenges is to propose robots which are sufficiently robust and autonomous, easily usable by non-specialists, and marked at a reasonable cost. We are involved in developing observation and surveillance systems, by using ground robots and aerial ones, see Fig. 4 . Since 2016, we develop solutions for 3D observation/exploration of complex scenes or environments with a fleet of UAVs (DynaFlock Inria/DGA project, Inria ADT CORDES⁰) or mobile robots (COMODYS FIL project [82]).

A more recent challenge for the coming decade is to develop robotized systems for assisting elderly and/or disabled people. In the continuity of our work in the IPL PAL⁰, we aim to propose smart technologies to assist electric wheelchair users in their displacements and also to control autonomous cars in human crowds (see Figure 17 for illustration). This concerns our recent "Hianic" ANR project. Another emerging application is humanoid robots helping humans at their home or work. In this context, we address the problem of NAMO (Navigation Among Movable Obstacles) in human populated environments (eg. PhD of B. Renault started on 2018). More generally we address navigation and reconnaissance tasks with Pepper humanoids in the context of the RoboCup-Social League.

⁰Institut de Recherche Technologique

⁰ENABLE-S3: European Initiative to Enable Validation for Highly Automated Safe and Secure Systems.

⁰Service Expérimentation et Développement

⁰Coordination d'une Flotte de Drones Connectés pour la Cartographie 3D d'édifices, led by O. Simonin.

⁰Personnally assisted Living

IMAGINE Project-Team

4. Application Domains

4.1. Target applications

Our research can be applied to any situation where users need to create new, imaginary, 3D content. Our work should be instrumental, in the long term, for the visual arts, from the creation of 3D films and games to the development of new digital planning tools for theater or cinema directors. Our models can also be used in interactive prototyping environments for engineering. They can help promoting interactive digital design to scientists, as a tool to quickly express, test and refine models, as well as an efficient way for conveying them to other people. Lastly, we expect our new methodology to put digital modeling within the reach of the general public, enabling educators, media and other practitioners to author their own 3D content. The diversity of users these domains bring, from digital experts to other professionals and novices, gives us excellent opportunities to validate our general methodology with different categories of users. Our ongoing projects in these various application domains are listed in Section 7.

4.2. Visual arts

- Sculpture.
- Modeling and animation for 3D films and games.
- Virtual cinematography and tools for theater directors.

4.3. Engineering

- Industrial design.
- Mechanical & civil engineering.

4.4. Natural sciences

- Geology.
- Virtual functional anatomy.

4.5. Education and creative tools

- Sketch-based teaching.
- Creative environments for novice users.
- Museography.

MAVERICK Project-Team

4. Application Domains

4.1. Application Domains

The natural application domain for our research is the production of digital images, for example for movies and special effects, virtual prototyping, video games... Our research have also been applied to tools for generating and editing images and textures, for example generating textures for maps. Our current application domains are:

- Offline and real-time rendering in movie special effects and video games;
- Virtual prototyping;
- Scientific visualization;
- Content modeling and generation (e.g. generating texture for video games, capturing reflectance properties, etc);
- Image creation and manipulation.

MOEX Project-Team (section vide)

MORPHEO Project-Team

4. Application Domains

4.1. 4D modeling

Modeling shapes that evolve over time, analyzing and interpreting their motion has been a subject of increasing interest of many research communities including the computer vision, the computer graphics and the medical imaging communities. Recent evolutions in acquisition technologies including 3D depth cameras (Time-of-Flight and Kinect), multi-camera systems, marker based motion capture systems, ultrasound and CT scanners have made those communities consider capturing the real scene and their dynamics, create 4D spatio-temporal models, analyze and interpret them. A number of applications including dense motion capture, dynamic shape modeling and animation, temporally consistent 3D reconstruction, motion analysis and interpretation have therefore emerged.

4.2. Shape Analysis

Most existing shape analysis tools are local, in the sense that they give local insight about an object's geometry or purpose. The use of both geometry and motion cues makes it possible to recover more global information, in order to get extensive knowledge about a shape. For instance, motion can help to decompose a 3D model of a character into semantically significant parts, such as legs, arms, torso and head. Possible applications of such high-level shape understanding include accurate feature computation, comparison between models to detect defects or medical pathologies, and the design of new biometric models.

4.3. Human Motion Analysis

The recovery of dense motion information enables the combined analysis of shapes and their motions. Typical examples include the estimation of mean shapes given a set of 3D models or the identification of abnormal deformations of a shape given its typical evolutions. The interest arises in several application domains where temporal surface deformations need to be captured and analyzed. It includes human body analyses for which potential applications are anyway numerous and important, from the identification of pathologies to the design of new prostheses.

4.4. Virtual and Augmented Reality

This domain has actually seen new devices emerge that enable now full 3D visualization, for instance the HTC Vive, the Microsoft HoloLens and the Magic Leap one. These devices create a need for adapted animated 3D contents that can either be generated or captured. We believe that captured 4D models will gain interest in this context since they provide realistic visual information on moving shapes that tend to avoid negative perception effects such as the uncanny valley effect. Besides 3D visualization devices, many recent applications also rely on everyday devices, such as mobile phones, to display augmented reality contents with free viewpoint ability. In this case, 3D and 4D contents are also expected.

PERCEPTION Project-Team (section vide)

PERVASIVE Project-Team

4. Application Domains

4.1. Modelling of awareness and expertise from Eye Gaze and Emotion

Humans display awareness and expertise through a variety of non-verbal channels. It is increasingly possible to record and interpret such information with available technology. In the ANR CEEGE project, we have constructed an instrument for capturing and interpreting multimodal signals of humans engaged in solving challenging problems. Our instrument captures eye gaze, fixations, body postures, and facial expressions signals from humans engaged in interactive tasks on a touch screen.

An initial experiment with multi-modal observation of human experts engaged in solving problems in Chess revealed an unexpected observation of rapid changes in emotion as players attempt to solve challenging problems. In a scientific collaboration with the NeuroCognition group at the Univ Bielefeld, we have constructed a model to explain for chess experts that explains these unexpected results. This model has recently been tested in a second experiment with 22 chess players. Our results indicate that chess players associate emotions to chess chunks, and reactively use these associations to guide search in chunks for planning and problem solving. These results have recently been reported in a paper at the International Conference on Multimodal Interaction, and is the subject of the nearly completed doctoral dissertation of Thomas Guntz.

The results are currently being used in the construction of a student aware driver training device to be commercialized by SME company Sym2B financed by the SATT Linksium Project MAT: Monitoring Attention of Trainees, starting in Sept 2019. IN this project we will construct a training simulator for operation of busses and tramways.

4.2. Narrative Description of Kitchen Activities from Egocentric Video

We have developed and evaluated a system to construct situated, narrative descriptions of cooking activities including food preparation, place setting, cleaning and placing objects in storage areas. We are specifically interested in real-time, on-line techniques that recognize and interpret food types, food states and manipulation actions for transformation preparation of food. We are exploring techniques for detecting, modelling, and recognising a large vocabulary of actions and activities under different observational conditions, and describing these activities in a larger context.

A full understanding of human actions requires: recognising what action has been performed, predicting how it will affect the surrounding environment, explaining why this action has been performed, and who is performing it. Classic approaches to action recognition interpret a spatio-temporal pattern in a video sequence to tell what action has been performed, and perhaps how and where it was performed. A more complete understanding requires information about why the action was performed, and how it affects the environment. This face of understanding can be provided by explaining the action as part of a narrative.

Most work on recognition of cooking activities has concentrated on recognizing actions from the spatio-temporal patterns of hand motions. While some cooking activities may be directly recognized from motion, the resulting description is incomplete, as it does not describe the state of the ingredients, and how these have been transformed by cooking actions. A fuller description requires a description of how food ingredients have been transformed during the food preparation process.

We have addressed the automatic construction of cooking narratives by first detecting and locating ingredients and tools used in food preparation. We then recognize actions that involve transformations of ingredients, such as "slicing", and use these transformations to segment the video stream into visual events. We can then interpret detected events as a causal sequence of voluntary actions, confirmed by spatio-temporal transformation patterns, in order to automatically provide a narrative.

Our method is inspired by the intuition that object states are visually more apparent than actions from a still frame and thus provide information that is complementary to spatio-temporal action recognition. We define a state transition matrix that maps action labels into a pre-state and a post-state. We identify key frames, and use these to learn appearance models of objects and their states. For recognition, we use a modified form of VGG neural network trained via transfer learning with a specially constructed data set of images of food types and food sates. Manipulation actions are hypothesized from the state transition matrix and provide complementary evidence to spatio temporal action recognition.

4.3. Embedded Computer Vision for low-power Bolometric Imaging

In cooperation with Schneider Electric, we have developed techniques for embedded real time image analysis and tracking algorithms using Bolometric Imaging Sensors. Such sensors capture light in the far infrared and return an image where each pixel is a measurement of temperature in degree centigrade. We have designed an integrated low-cost sensor that combines an 80x80 pixel Bolometric imager with a low power micro-processor. The device provides real-time, embedded image processing for target detection and activity analysis where all sensing and interpretation is local. No images are recorded and only relevant information is about activity is communicated. The design of this system is under consideration for a patent, and thus has not been published. The software system has been registered with French APP , and is to be licensed to Schneider Electric for use a line of sensors for detecting falls and other activities for assisted living for seniors, as well as monitoring customer activities in commercial environments.

4.4. Recognizing and predicting routine activities in smart homes

Most research on smart home systems has concentrated on techniques for recognizing context. However, many categories of service require information about likely future context. We have developed an approach that uses dynamic Bayesian networks to predict future activity and context in a smart home. Our approach extends a state-of-the-art prediction model with three contributions. First, we include sensor data through aggregation nodes, instead of limiting ourselves only to higher level context data. Second, our method uses higher order relations between activities, so that past activities can have a more meaningful impact on prediction of future activities. Third, we use a latent node that estimates the cognitive state of the occupant.

4.5. User centred energy management

Participants: Amr Al-Zouhri Al-Yafi, Amine Awada, Patrick Reignier Partners: UMR G-SCOP, UMR LIG (Persuasive Interaction, IIHM), CEA Liten, PACTE, Vesta Systems and Elithis.

Work in this area explores techniques for a user centric energy management system, where user needs and tacit knowledge drive the search of solutions. These are calculated using a flexible energy model of the living areas. The system is personified by energy consultants with which building actors such as building owners, building managers, technical operators but also occupants, can interact in order to co-define energy strategies, benefiting of both assets: tacit knowledge of human actors, and measurement with computation capabilities of calculators. Putting actors in the loop, i.e. making energy not only visible but also controllable is the needed step before large deployment of energy management solutions. It is proposed to develop interactive energy consultants for all the actors, which are energy management aided systems embedding models in order to support the decision making processes. MIRROR (interactive monitoring), WHAT-IF (interactive quantitative simulation), EXPLAIN (interactive qualitative simulation), SUGGEST-AND-ADJUST (interactive management) and RECOMMEND (interactive diagnosis) functionalities will be developed.

4.6. E-Textile

Participant: Sabine Coquillart

Partner: LIMSI

Collaboration with the HAPCO team from LIMSI on e-textiles. A patent application has been filed related to this work:

- F. Bimbard, M. Bobin, M. Ammi, S. Coquillart "Procédé de conception d'un capteur de flexion textile piézorésistif à partir de fils fonctionnels", Patent Application, 2017.

4.7. Interaction with Pervasive Media

Participants: Sabine Coquillart, Jingtao Chen

Partners: Inria GRA, GIPSA, G-SCOP

Pseudo-haptic feedback is a technique aiming to simulate haptic sensations without active haptic feedback devices. Pseudo-haptic techniques have been used to simulate various haptic feedbacks such as stiffness, torques, and mass. In the framework of Jingtao Chen PhD thesis, a novel pseudo-haptic experiment has been set up. The aim of this experiment is to study the EMG signals during a pseudo-haptic task. A stiffness discrimination task similar to the one published in Lecuyer's PhD thesis has been chosen. The experimental set-up has been developed, as well as the software controlling the experiment. Pre-tests are under way. They will be followed by the tests with subjects.

THOTH Project-Team

4. Application Domains

4.1. Visual applications

Any solution to automatically understanding images and videos on a semantic level will have an immediate impact on a wide range of applications. For example:

- Semantic-level image and video access is highly relevant for visual search on the Web, in professional archives and personal collections.
- Visual data organization is applicable to organizing family photo and video albums as well as to large-scale information retrieval.
- Visual object recognition has potential applications ranging from surveillance, service robotics for assistance in day-to-day activities as well as the medical domain.
- Action recognition is highly relevant to visual surveillance, assisted driving and video access.
- Real-time scene understanding is relevant for human interaction through devices such as HoloLens, Oculus Rift.

4.2. Pluri-disciplinary research

Machine learning is intrinsically pluri-disciplinary. By developing large-scale machine learning models and algorithms for processing data, the Thoth team became naturally involved in pluri-disciplinary collaborations that go beyond visual modelling. In particular,

- extensions of unsupervised learning techniques originally developed for modelling the statistics of natural images have been deployed in neuro-imaging for fMRI data with the collaboration of the Parietal team from Inria.
- similarly, deep convolutional data representations, also originally developed for visual data, have been successfully extended to the processing of biological sequences, with collaborators from bio-informatics.
- Thoth also collaborates with experts in natural language and text processing, for applications where visual modalities need to be combined with text data.

TYREX Project-Team

4. Application Domains

4.1. Querying Large Graphs

Increasingly large amounts of graph-structured data become available. The methods we develop apply for the efficient evaluation of graph queries over large — and potentially distributed — graphs. In particular, we consider the SPARQL query language, which is the standard language for querying graphs structured in the Resource Description Format (RDF). We also consider other increasingly popular graph query languages such as Cypher queries for extracting information from property graphs.

We compile graph queries into lower-level distributed primitives found in big data frameworks such as Apache Spark, Flink, etc. Applications of graph querying are ubiquitous and include: large knowledge bases, social networks, road networks, trust networks and fraud detection for cryptocurrencies, publications graphs, web graphs, recommenders, etc.

4.2. Predictive Analytics for Healthcare

One major expectation of data science in healthcare is the ability to leverage on digitized health information and computer systems to better apprehend and improve care. The availability of large amounts of clinical data and in particular electronic health records opens the way to the development of quantitative models for patients that can be used to predict health status, as well as to help prevent disease and adverse effects.

In collaboration with the CHU Grenoble, we explore solutions to the problem of predicting important clinical outcomes such as patient mortality, based on clinical data. This raises many challenges including dealing with the very high number of potential predictor variables and very resource-consuming data preparation stages.